


LIFT & TILT (PT) COMBINATION SERIES

10 Year/250,000 Cycle Warranty

These lift and tilt units are optimized combination designs that are used where the lifting and tilting functions must be done independently.

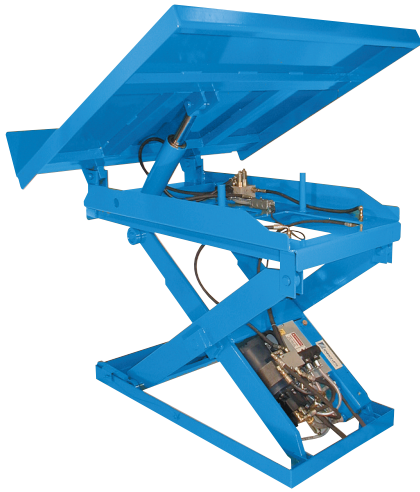

SPECIAL FEATURES

- ▶ These units are equipped with the patented “Platform Centering Devices”, which doubles or triples lift life.
- ▶ These units are equipped with single internally mounted power units.
- ▶ All of the controllers are Underwriter Laboratory listed assemblies.
- ▶ All hydraulic cylinders are machine grade with clear plastic return lines.
- ▶ All pressure hoses are double wire braid with JIC fittings.
- ▶ These units are fully primed and finished with baked enamel.

SPECIFICATION TABLE FOR LIFT AND TILT UNITS

Model	Lift Travel	Tilt Angle	Capacity	Platform		Lowered Height	Raised Height	Lift Up Speed	Tilt Up Speed	Ship Weight
				Minimum	Maximum					
PT-20243-I	24	30°	2000	30 x 36	48 x 60	14-1/4	38-1/4	10	6	800
PT-35243-I	24	30°	3500	30 x 36	48 x 60	14-1/4	38-1/4	15	12	890
PT-55243-I	24	30°	5500	30 x 36	48 x 60	14-1/4	38-1/4	22	12	925
PT-20363-I	36	30°	2000	30 x 48	48 x 60	14-1/4	50-1/4	11	5	910
PT-35363-I	36	30°	3500	30 x 48	48 x 60	14-1/4	50-1/4	17	9	1000
PT-55363-I	36	30°	5500	30 x 48	48 x 60	14-1/4	50-1/4	23	9	1045
PT-20483-I	48	30°	2000	30 x 60	48 x 60	14-3/4	62-3/4	18	5	1090
PT-35483-I	48	30°	3500	30 x 60	48 x 60	14-3/4	62-3/4	27	9	1195
PT-55483-I	48	30°	5500	30 x 60	48 x 60	14-3/4	62-3/4	37	9	1250
PT-20244-I	24	45°	2000	30 x 36	48 x 60	14-1/4	38-1/4	10	10	810
PT-35244-I	24	45°	3500	30 x 36	48 x 60	14-1/4	38-1/4	15	20	900
PT-55244-I	24	45°	5500	30 x 36	48 x 60	14-1/4	38-1/4	22	20	935
PT-20364-I	36	45°	2000	30 x 48	48 x 60	14-1/4	50-1/4	11	7	920
PT-35364-I	36	45°	3500	30 x 48	48 x 60	14-1/4	50-1/4	17	15	1010
PT-55364-I	36	45°	5500	30 x 48	48 x 60	14-1/4	50-1/4	23	15	1055
PT-20484-I	48	45°	2000	30 x 60	48 x 60	14-3/4	62-3/4	18	7	1100
PT-35484-I	48	45°	3500	30 x 60	48 x 60	14-3/4	62-3/4	27	15	1205
PT-55484-I	48	45°	5500	30 x 60	48 x 60	14-3/4	62-3/4	37	15	1260
PT-20246-I	24	60°	2000	30 x 36	48 x 60	14-1/4	38-1/4	10	13	815
PT-35246-I	24	60°	3500	30 x 36	48 x 60	14-1/4	38-1/4	15	27	905
PT-55246-I	24	60°	5500	30 x 36	48 x 60	14-1/4	38-1/4	22	27	940
PT-20366-I	36	60°	2000	30 x 48	48 x 60	14-1/4	50-1/4	11	10	925
PT-35366-I	36	60°	3500	30 x 48	48 x 60	14-1/4	50-1/4	17	20	1015
PT-50366-I	36	60°	5000	30 x 48	48 x 60	14-1/4	50-1/4	23	20	1060
PT-20486-I	48	60°	2000	30 x 60	48 x 60	14-3/4	62-3/4	18	10	1105
PT-35486-I	48	60°	3500	30 x 60	48 x 60	14-3/4	62-3/4	27	20	1210
PT-50486-I	48	60°	5000	30 x 60	48 x 60	14-3/4	62-3/4	37	20	1265