

**Lifting Beams**  
**Adjustable Length Lifting Beams**  
**with Shackle bottoms**

Machining & Welding  
 www.MachiningAndWelding.com

Sales@MachiningAndWelding.com



LIFTING BEAMS


**Adjustable Length Lifting Beams with Shackle bottoms**

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Quick and easy adjustment of unbalanced loads.
- Ideally suited to low headroom applications.
- Shackle bottoms standard for rigging connections.
- Swivel hooks, eye hooks and custom connections available - call for ordering assistance.

RFID TRACKING



CHIP EQUIPPED

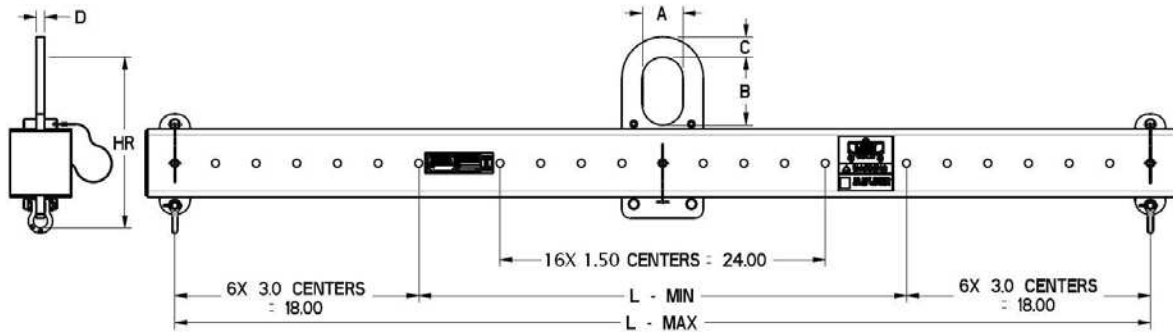

Working Load Limit in Pounds*	Part Number	L min	L max	A	B	C	D	HR	Weight in Pounds
2,000	<b>15101</b>	36	72	3	5	0.75	0.63	11.8	85
2,000	<b>14678</b>	72	144	3	5	0.75	0.63	13.8	285
4,000	<b>12453</b>	36	72	3	5	1.5	0.63	12.6	135
4,000	<b>12495</b>	72	144	3	5	1.5	0.63	14.6	331
6,000	<b>14669</b>	36	72	3	5	1.5	0.63	14.8	170
6,000	<b>14661</b>	72	144	3	5	1.5	0.63	17.8	535
8,000	<b>12503</b>	36	72	4	7	2	0.75	18.0	201
8,000	<b>12512</b>	72	144	4	7	2	0.75	20.0	543
10,000	<b>14651</b>	36	72	4	7	2	0.75	20.0	310
10,000	<b>15108</b>	72	144	4	7	2	0.75	21.0	805
15,000	<b>15117</b>	36	72	4	7	2	1.00	20.7	325
15,000	<b>15128</b>	72	144	4	7	2	1.00	23.7	830

\* Call for specifications on larger sizes and capacities

RFID TRACKING  
  
 CHIP EQUIPPED





Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

**Lifting Beams**  
**Adjustable Length Lifting Beams**  
**with Swivel Hook bottoms**


**Adjustable Length Lifting Beams with Swivel Hook bottoms**

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Quick and easy adjustment of unbalanced loads.
- Ideally suited to low headroom applications.
- Pictured with standard alloy swivel latch hooks.
- Eye hooks and custom connections available - call for ordering assistance.

RFID TRACKING



CHIP EQUIPPED

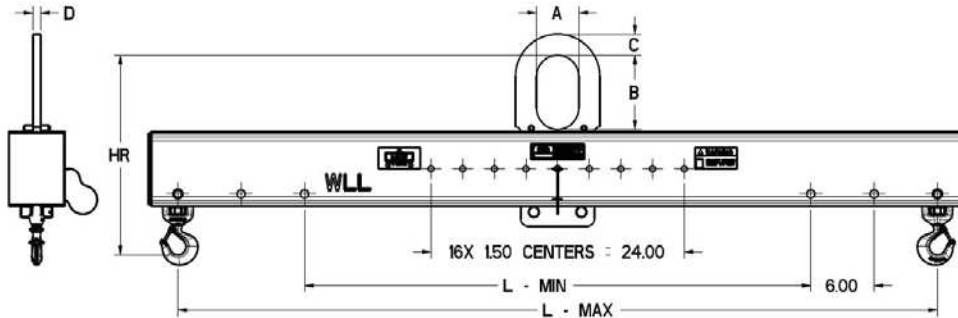

Working Load Limit in Pounds*	Part Number	L min	L max	A	B	C	D	HR	Weight in Pounds
2,000	<b>16410</b>	48	72	3	5	0.75	0.63	13.8	85
2,000	<b>16411</b>	120	144	3	5	0.75	0.63	15.7	285
4,000	<b>16412</b>	48	72	3	5	1.5	0.63	14.6	135
4,000	<b>16413</b>	120	144	3	5	1.5	0.63	16.6	330
6,000	<b>16414</b>	48	72	3	5	1.5	0.63	16.2	160
6,000	<b>16415</b>	120	144	3	5	1.5	0.63	19.1	530
8,000	<b>16416</b>	48	72	4	7	2	0.75	18.9	200
8,000	<b>16417</b>	120	144	4	7	2	0.75	20.9	540
10,000	<b>16418</b>	48	72	4	7	2	0.75	21.2	300
10,000	<b>16419</b>	120	144	4	7	2	0.75	22.2	795
15,000	<b>16420</b>	48	72	4	7	2	1.00	22.1	315
15,000	<b>16421</b>	120	144	4	7	2	1.00	25.1	815

\* Call for specifications on larger sizes and capacities






Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

**Lifting Beams**  
**Adjustable Economy Lifting Beams**

**Adjustable Economy Lifting Beams**

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
  - Quick and easy adjustment of unbalanced loads.
  - Ideally suited to low headroom applications.
  - Shackle bottoms standard for rigging connections.
  - Swivel hooks, eye hooks and custom connections available - call for ordering assistance.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Beams supplied standard with shackle connections.

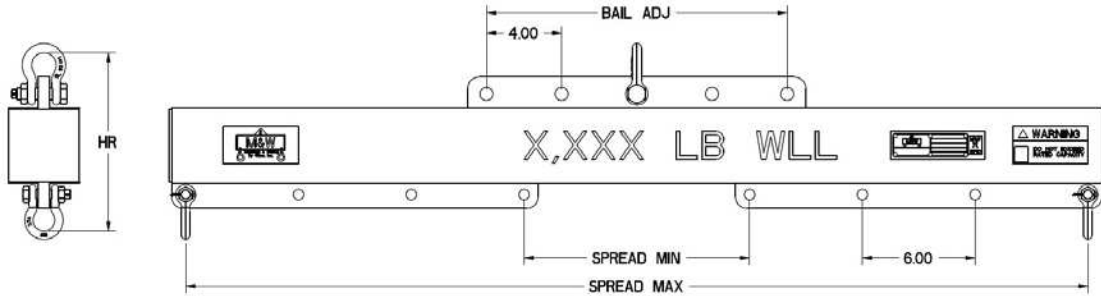

Working Load Limit in Pounds*	Part Number	Max Spread	Min Spread	Bail Adj	HR	Weight in Pounds	Top Shackle Part Number	Bottom Shackle Part Number
500	13855	48	12	16	7.57	45	1019470	1019470
500	13862	72	36	16	7.57	60	1019470	1019470
500	13866	96	60	16	7.57	75	1019470	1019470
1,000	13878	48	12	16	7.57	45	1019470	1019470
1,000	13879	72	36	16	7.57	60	1019470	1019470
1,000	13869	96	60	24	8.57	95	1019470	1019470
2,000	13880	48	12	16	8.57	60	1019470	1019470
2,000	13886	72	36	24	9.57	80	1019470	1019470
2,000	13889	96	60	24	9.57	150	1019470	1019470
2,000	13893	120	84	24	9.57	180	1019470	1019470
4,000	13924	48	12	16	9.48	65	1019472	1019471
4,000	13933	72	36	24	10.48	125	1019472	1019471
4,000	13938	96	60	24	11.48	240	1019472	1019471
4,000	14130	120	84	24	11.48	295	1019472	1019471
8,000	14134	72	24	32	15.12	175	1019515	1019490
8,000	14150	96	48	32	16.12	280	1019515	1019490
8,000	14154	120	72	32	16.12	435	1019515	1019490
10,000	14159	96	36	32	16.12	365	1019515	1019490
10,000	14162	120	60	32	17.12	465	1019515	1019490
10,000	14167	144	84	32	18.12	675	1019515	1019490
14,000	14171	120	48	32	19.42	610	1019533	1019515
14,000	14177	144	72	32	21.42	715	1019533	1019515
14,000	14182	168	96	32	21.42	965	1019533	1019515



RFID TRACKING



CHIP EQUIPPED

\* Call for specifications on larger sizes and capacities

**Lifting Beams  
Barrel / Bucket Lifter**

Machining & Welding  
www.MachiningAndWelding.com


Sales@MachiningAndWelding.com



LIFTING BEAMS

**Barrel / Bucket Lifter**


- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- Durable construction ideally suited to jobsite or warehouse use.
- Drum lid MUST be properly secured
- Self-adjusting to lift rimmed steel, plastic or fiber drums
- Made in U.S.A.
- Machined to exacting tolerances.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.

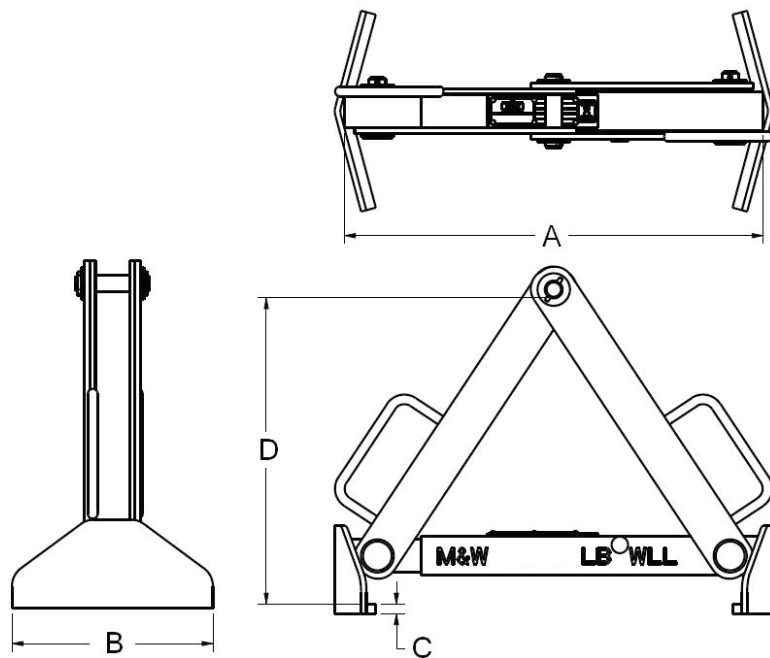

RFID TRACKING



CHIP EQUIPPED

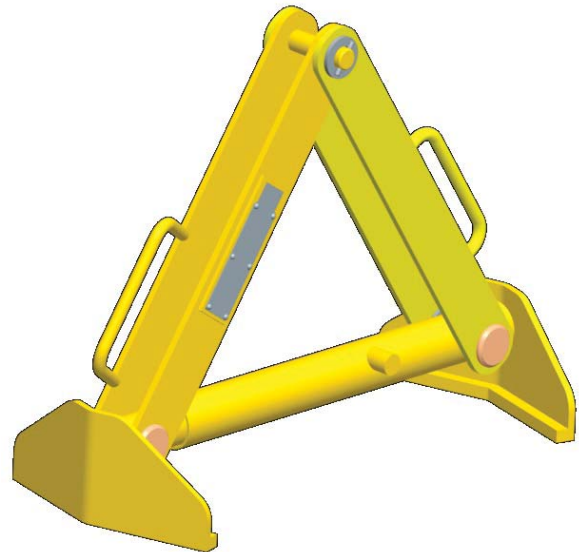

Working Load Limit in Pounds*	Part Number	Weight in Pounds	A min	A max	B	C	D
1,200	<b>16291</b>	22	18.0	29.0	9.1	0.44	13.9
1,000	<b>16656</b>	17	14.0	20.0	9.1	0.44	11.9

\* Call for specifications on larger sizes and capacities

**Lifting Beams  
Basket Lifting Beam**

Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com



LIFTING BEAMS



**Basket Lifting Beam**

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Designed to be used with lifting slings in a basket hitch
- Two sets of lifting sling hooks are standard
- Hooks designed for 2" eye width
- Custom configurations available - call for ordering assistance

RFID TRACKING



CHIP EQUIPPED

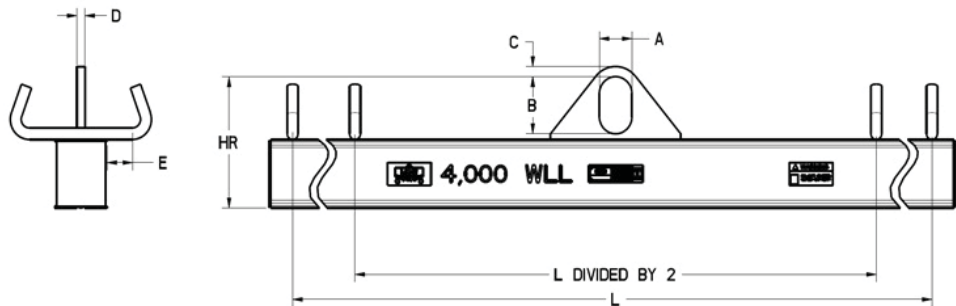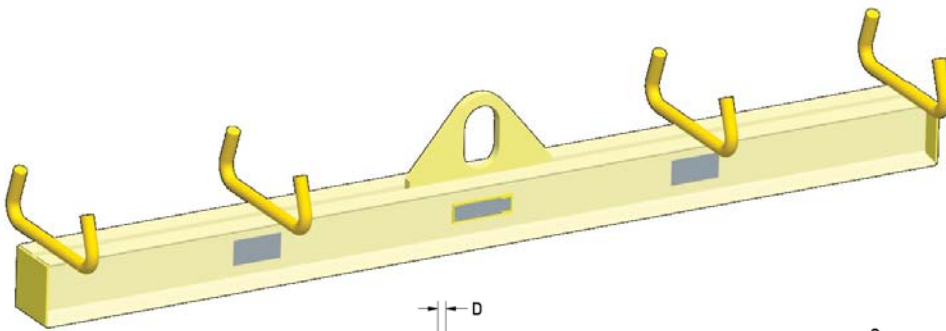

Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*							A (in) B (in) E (in)
		4	6	8	10	12	14	16	
1,000	<b>Part Number</b>	<b>17492</b>	<b>17493</b>	<b>17494</b>	<b>17495</b>	<b>17496</b>	<b>17497</b>	<b>17498</b>	3.0
	HR =	9.50	9.50	9.50	9.50	9.50	9.50	10.50	5.0
	LBS =	65	80	100	120	205	235	315	2.0
2,000	<b>Part Number</b>	<b>17499</b>	<b>17500</b>	<b>17501</b>	<b>17502</b>	<b>17503</b>	<b>17504</b>	<b>17505</b>	3.0
	HR =	9.50	9.50	10.50	10.50	10.50	11.50	11.50	5.0
	LBS =	65	80	175	210	245	325	370	2.0
4,000	<b>Part Number</b>	<b>17506</b>	<b>17507</b>	<b>17154</b>	<b>17508</b>	<b>17509</b>	<b>17510</b>	<b>17511</b>	3.0
	HR =	10.50	10.50	11.50	11.50	12.50	13.50	13.50	5.0
	LBS =	110	150	210	310	340	580	660	2.0
10,000	<b>Part Number</b>	<b>17512</b>	<b>17513</b>	<b>17514</b>	<b>17515</b>	<b>17516</b>	<b>17517</b>	<b>16574</b>	3.0
	HR =	16.37	16.37	16.37	17.37	17.37	17.37	17.37	5.0
	LBS =	260	340	425	510	720	965	1,090	2.0

\* Call for specifications on larger sizes and capacities

**Lifting Beams  
Bottle Lifting Device**

Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com



**Bottle Lifting Device**






- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Bottle Lifters proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
  - Adjustable straps to hold tanks
  - Lockable doors

- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.

RFID TRACKING



CHIP EQUIPPED

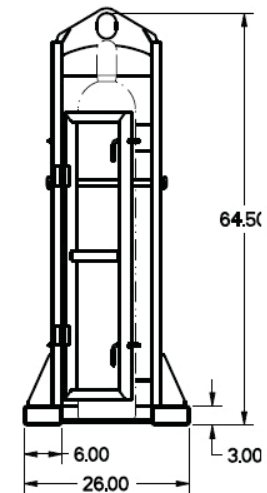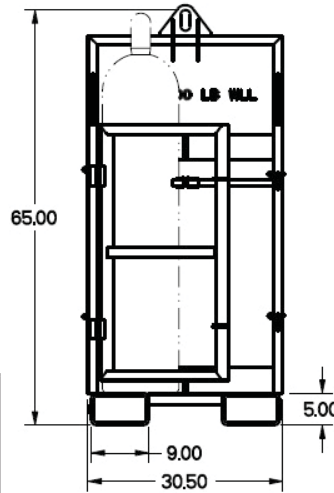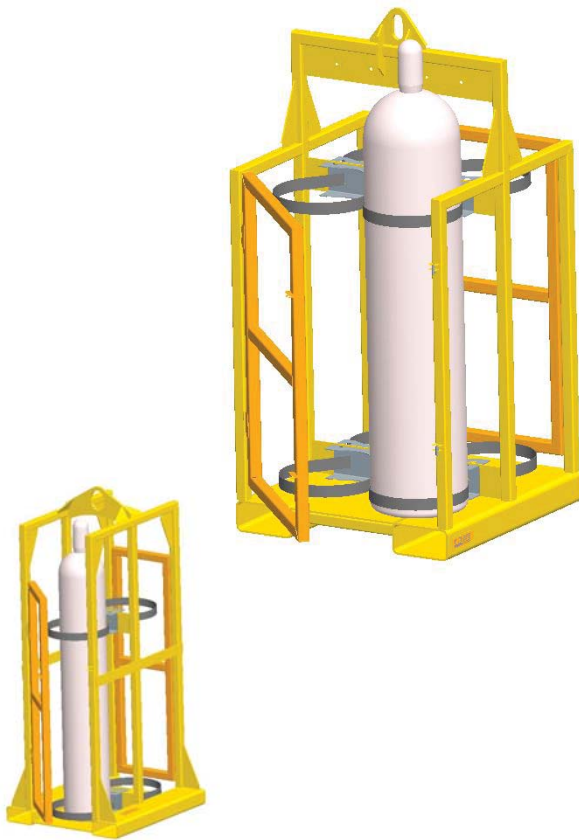

4 BOTTLE LIFTER

2 BOTTLE LIFTER

Working Load Limit in Pounds*	Part Number	Tank Capacity	Weight
750	<b>16307</b>	2	300
1,500	<b>17324</b>	4	525

\* Call for specifications on larger sizes and capacities



Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

**Lifting Beams**  
**Bulk Container Lifting Beam**

**Bulk Container Lifting Beam**

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** material handling equipment proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Machined to exacting tolerances.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.




Part Number*	SPREAD	A	B	C	D	E	HR	Weight	Working Load Limit in Pounds*
<b>13316</b>	36	1.0	3.0	4.0	5.0	50.9	8.0	105	2,000
<b>13310</b>	48	1.0	3.0	4.0	5.0	67.9	8.0	135	2,000
<b>13325</b>	36	1.0	3.0	4.0	5.0	50.9	10.0	120	4,000
<b>13321</b>	48	1.0	3.0	4.0	5.0	67.9	10.0	150	4,000

\*Larger capacities and custom configurations available. Please call for ordering assistance.

RFID TRACKING



CHIP EQUIPPED

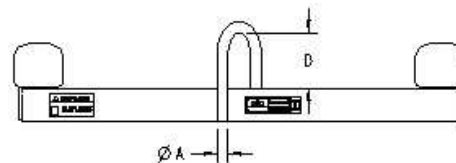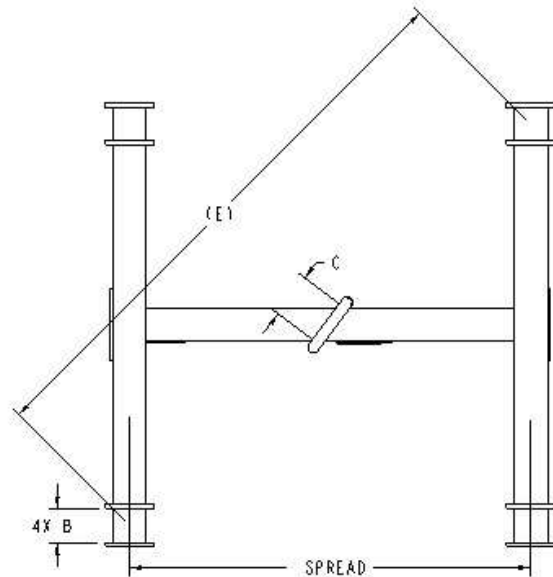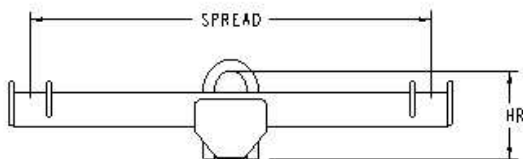




Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

Lifting Beams  
Economy (Fixed Length) Lifting Beams

Economy (Fixed Length) Lifting Beams

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Beams supplied standard with shackle connections.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.

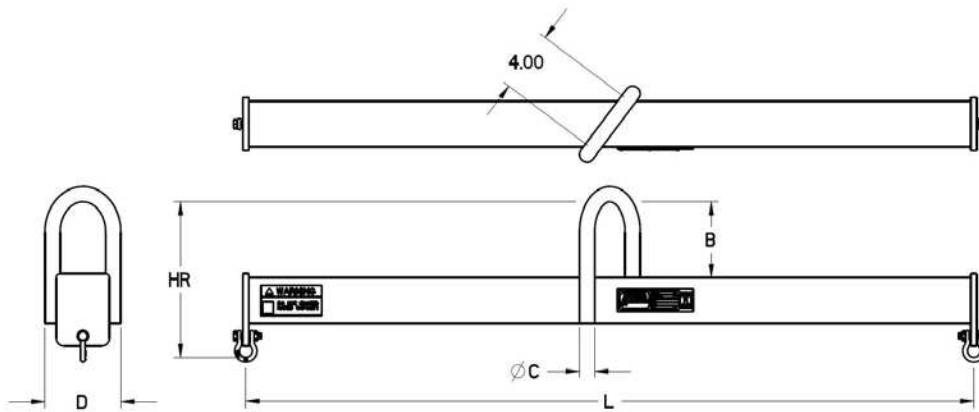

Working Load Limit in Pounds*	Part number Headroom Weight	Spread in Inches - L										C	B	D
		24	36	42	48	54	60	66	72	96	120			
500	Part number HR= Weight	16561 10.25 17	12540 10.25 22	15028 10.25 25	11525 10.25 28	15031 10.25 30	15034 10.25 33	15037 10.25 36	11526 10.25 38	11527 10.25 49	11528 10.25 60	0.75	5.0	3.5
1,000	Part number HR= Weight	16140 10.25 27	12546 10.25 28	15040 10.25 30	11529 10.25 34	15043 10.25 36	15046 10.25 40	15049 10.25 43	11530 10.25 48	11531 10.25 63	11532 11.25 94	0.75	5.0	3.5
2,000	Part number HR= Weight	16124 10.25 26	15054 10.25 35	15057 10.25 39	11533 10.25 47	15060 11.25 57	15063 11.25 62	15066 11.25 67	11534 11.25 72	11535 13.25 124	11536 12.25 132	1.00	5.0	5.0
4,000	Part number HR= Weight	16381 11.51 32	15070 12.50 50	15073 12.50 54	11537 12.50 61	15076 13.50 75	15079 13.50 82	15082 13.50 89	11538 13.50 96	11539 13.50 124	11540 15.50 187	1.00	5.0	5.0
6,000	Part number HR= Weight	16382 14.77 48	14433 15.77 66	15085 15.77 73	14438 17.77 95	15092 17.77 104	15095 17.77 113	15098 17.77 122	14442 17.77 130	14445 17.77 227	14452 17.77 351	1.50	7.0	6.0

\* Call for specifications on larger sizes and capacities







Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

## Lifting Beams Economy H-Beam

### Economy H-Beam

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
  - Quick and easy adjustment of unbalanced loads.
  - Ideally suited to low headroom applications.
  - Eye hooks and custom connections available - call for ordering assistance.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.


RFID TRACKING



CHIP EQUIPPED


Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*			
		4	6	8	10
1,000 48" Width	<b>Part Number</b>	<b>17560</b>	<b>17563</b>	<b>17566</b>	
	HR = LBS =	15.1 135	15.1 150	16.1 185	
2,000 48" Width	<b>Part Number</b>	<b>17569</b>	<b>17572</b>	<b>17575</b>	
	HR = LBS =	16.1 150	17.1 180	17.1 250	
4,000 48" Width	<b>Part Number</b>	<b>17578</b>	<b>17582</b>	<b>17586</b>	<b>17590</b>
	HR = LBS =	18.1 185	19.1 245	20.1 360	20.1 415
8,000 48" Width	<b>Part Number</b>		<b>17598</b>	<b>17602</b>	<b>17606</b>
	HR = LBS =		25.6 305	25.6 410	25.6 565

\* Call for specifications on larger sizes and capacities

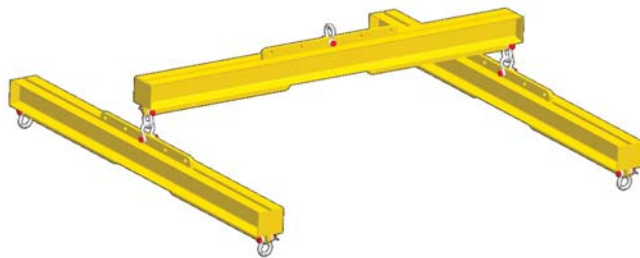

Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*			
		4	6	8	10
1,000 72" Width	<b>Part Number</b>	<b>17561</b>	<b>17564</b>	<b>17567</b>	
	HR = LBS =	15.1 165	15.1 180	16.1 215	
2,000 72" Width	<b>Part Number</b>	<b>17570</b>	<b>17573</b>	<b>17576</b>	
	HR = LBS =	17.1 170	17.1 200	18.1 340	
4,000 72" Width	<b>Part Number</b>	<b>17579</b>	<b>17583</b>	<b>17587</b>	<b>17591</b>
	HR = LBS =	19.1 255	19.1 285	21.1 400	21.1 455
8,000 72" Width	<b>Part Number</b>		<b>17599</b>	<b>17603</b>	<b>17607</b>
	HR = LBS =		26.6 425	26.6 530	26.6 685

\* Call for specifications on larger sizes and capacities

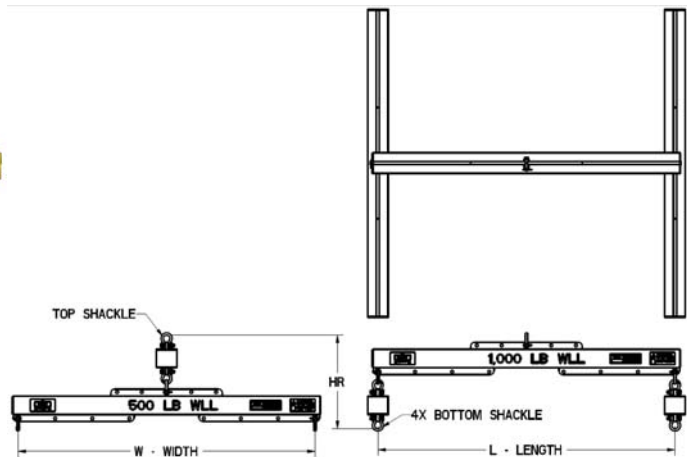

Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*			
		4	6	8	10
1,000 96" Width	<b>Part Number</b>	<b>17562</b>	<b>17565</b>	<b>17568</b>	
	HR = LBS =	15.1 195	15.1 210	16.1 245	
2,000 96" Width	<b>Part Number</b>	<b>17571</b>	<b>17574</b>	<b>17577</b>	
	HR = LBS =	17.1 240	17.1 270	18.1 340	
4,000 96" Width	<b>Part Number</b>	<b>17580</b>	<b>17584</b>	<b>17588</b>	<b>17592</b>
	HR = LBS =	19.1 365	19.1 425	20.1 540	20.1 595
8,000 96" Width	<b>Part Number</b>		<b>17600</b>	<b>17604</b>	<b>17608</b>
	HR = LBS =		27.6 655	27.6 760	27.6 915

\* Call for specifications on larger sizes and capacities

Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*			
		4	6	8	10
4,000 120" Width	<b>Part Number</b>	<b>17581</b>	<b>17585</b>	<b>17589</b>	<b>17593</b>
	HR = LBS =	19.1 425	19.1 485	21.1 600	21.1 655
8,000 120" Width	<b>Part Number</b>		<b>17601</b>	<b>17605</b>	<b>17609</b>
	HR = LBS =		27.6 765	27.6 870	27.6 1,025

\* Call for specifications on larger sizes and capacities



Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

**Lifting Beams**  
**Low Headroom, Multiple Length**  
**Standard Lifting Beam**

**Low Headroom, Multiple Length Standard Lifting Beam**

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Machined to exacting tolerances.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Pictured with standard alloy swivel latch hooks.
- Ideally suited for low headroom lifting applications.
- Multiple latch hooks, eye latch hooks and shackle plates available. Please call for ordering assistance.

Working Load Limit in Pounds	Model Number Headroom (in) Weight (lbs)	Outside Length (L) in Feet				
		4	6	8	10	12
1,000	<b>Part Number</b>	<b>11937</b>	<b>11959</b>	<b>11960</b>	<b>11961</b>	<b>11962</b>
	HR =	13.11	13.11	13.11	13.11	13.11
	LBS =	56	75	95	115	200
2,000	<b>Part Number</b>	<b>11983</b>	<b>11984</b>	<b>11985</b>	<b>11989</b>	<b>11990</b>
	HR =	13.11	13.11	14.11	14.11	14.11
	LBS =	56	75	167	205	240
4,000	<b>Part Number</b>	<b>12032</b>	<b>12033</b>	<b>12034</b>	<b>12039</b>	<b>12042</b>
	HR =	15.12	15.12	16.12	16.12	17.12
	LBS =	98	135	200	295	395
6,000	<b>Part Number</b>	<b>12069</b>	<b>12084</b>	<b>12087</b>	<b>12090</b>	<b>12094</b>
	HR =	15.25	16.25	17.25	18.25	18.25
	LBS =	120	180	255	380	440
10,000	<b>Part Number</b>	<b>12117</b>	<b>12123</b>	<b>12126</b>	<b>12129</b>	<b>12132</b>
	HR =	21.25	21.25	21.25	22.25	21.12
	LBS =	265	345	430	500	590
15,000	<b>Part Number</b>	<b>12162</b>	<b>12165</b>	<b>12168</b>	<b>12171</b>	<b>12174</b>
	HR =	24.27	24.28	25.28	25.28	25.28
	LBS =	265	365	450	640	870
20,000	<b>Part Number</b>	<b>12199</b>	<b>12202</b>	<b>12205</b>	<b>12208</b>	<b>12212</b>
	HR =	23.75	24.75	24.75	26.75	29.75
	LBS =	290	375	625	755	985
30,000	<b>Part Number</b>	<b>12223</b>	<b>12229</b>	<b>12232</b>	<b>12236</b>	<b>12263</b>
	HR =	29.00	29.00	34.00	34.00	40.20
	LBS =	345	555	675	1,235	1,185
40,000	<b>Part Number</b>	<b>12250</b>	<b>12254</b>	<b>12257</b>	<b>12287</b>	<b>12292</b>
	HR =	33.81	33.81	33.81	41.79	41.97
	LBS =	445	850	1,050	1,195	1,540

**Lifting Beams**  
**Low Headroom, Multiple Length**  
**Standard Lifting Beam**

Machining & Welding  
 www.MachiningAndWelding.com

Sales@MachiningAndWelding.com




LIFTING BEAMS

RFID TRACKING



CHIP EQUIPPED

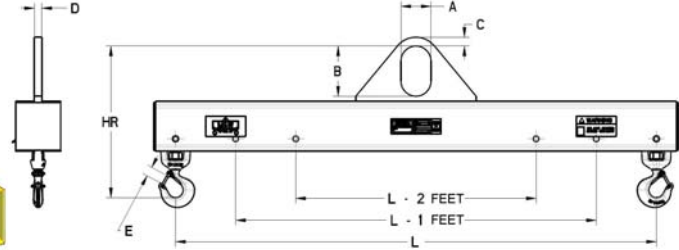

Outside Length (L) in Feet					Other Dimensions	Working Load Limit in Pounds
14	16	18	20	24		
<b>11968</b> 13.11 226	<b>11971</b> 14.11 313	<b>11974</b> 14.11 350	<b>11977</b> 14.11 390	<b>11981</b> 15.11 535	C=.875, A=3.0 B=5.0, D=.75 E=.91	1,000
<b>12017</b> 15.11 320	<b>12018</b> 15.11 365	<b>12019</b> 15.11 500	<b>12020</b> 16.11 525	<b>12024</b> 17.11 945	C=.875, A=3.0 B=5.0, D=.75 E=.91	2,000
<b>12046</b> 18.12 575	<b>12050</b> 18.12 650	<b>12055</b> 19.12 771	<b>12059</b> 20.12 1,060	<b>12063</b> 22.12 1,510	C=.875, A=3.0 B=5.0, D=.75 E=1.0	4,000
<b>12098</b> 19.25 635	<b>12102</b> 19.25 715	<b>12106</b> 20.25 990	<b>12109</b> 20.25 1,295	<b>12112</b> 22.25 1,310	C=1.25, A=3.0 B=5.0, D=1.00 E=1.00	6,000
<b>12138</b> 22.25 970	<b>12141</b> 22.25 1,095	<b>12148</b> 24.25 1,035	<b>12152</b> 24.25 1,340	<b>12155</b> 26.50 1,800	C=2.0, A=4.0 B=7.0, D=1.25 E=1.09	10,000
<b>12177</b> 27.28 1,000	<b>12180</b> 30.28 1,265	<b>12183</b> 30.28 1,405	<b>12186</b> 29.84 1,800		C=2.0, A=4.0 B=7.0, D=1.25 E=1.56	15,000
<b>12215</b> 29.75 1,595	<b>12218</b> 29.75 1,799	<b>12280</b> 35.08 1,655	<b>12284</b> 35.08 1,815		C=2.0, A=4.0 B=7.0, D=1.25 E=1.61	20,000
<b>12267</b> 40.48 1,540	<b>12270</b> 40.66 1,865	<b>12274</b> 40.84 2,250	<b>12277</b> 41.07 2,750		C=2.5, A=5.0 B=9.0, D=1.50 E=2.08	30,000
<b>12295</b> 42.15 1,850	<b>12300</b> 43.58 2,130	<b>12304</b> 43.74 2,555	<b>12307</b> 43.92 3,045		C=2.5, A=5.0 B=9.0, D=1.50 E=2.08	40,000



Machining & Welding  
 www.MachiningAndWelding.com  
 Sales@MachiningAndWelding.com

**Lifting Beams**  
**Non-Conductive Lifting Beam**



**Non-Conductive Lifting Beam**

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow lift lug for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Quick and easy adjustment of unbalanced loads.
- Ideally suited to handle large batteries
- Natural spark proof insulation
- Optional Hooks and Lug connections available - call for ordering assistance

RFID TRACKING



CHIP EQUIPPED

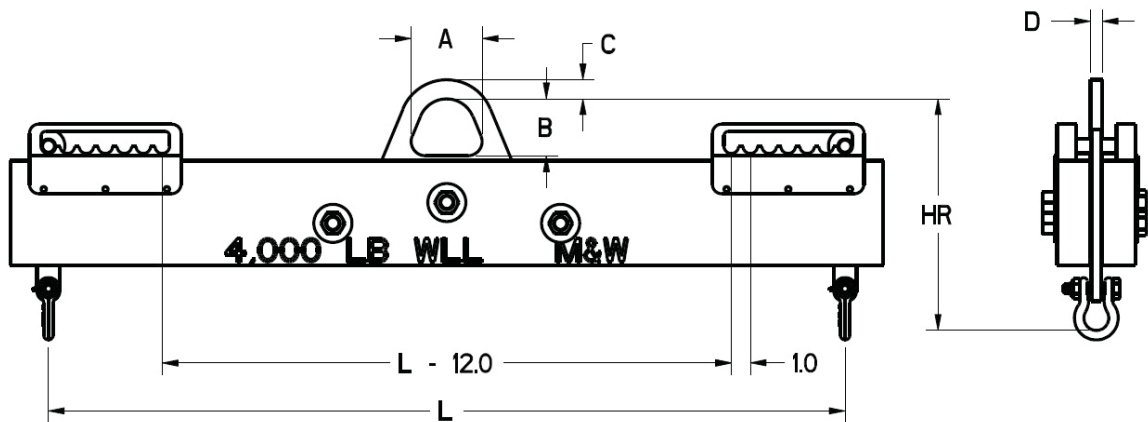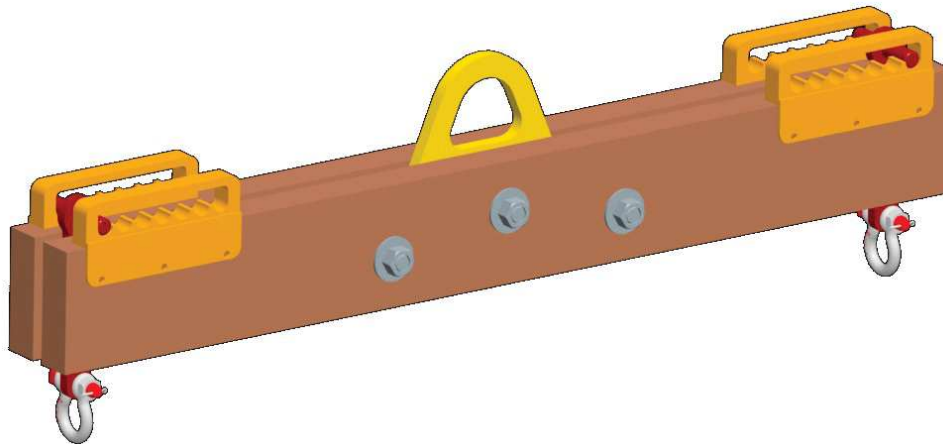

Working Load Limit in Pounds*	Part Number	A	B	C	D	HR	L min	L max
2,000	17441	3.8	3.0	1.0	0.63	10.15	18.0	30.0
2,000	17442	3.8	3.0	1.0	0.63	10.15	30.0	42.0
4,000	17443	3.8	3.0	1.0	0.63	12.20	18.0	30.0
4,000	17171	3.8	3.0	1.0	0.63	12.20	30.0	42.0

\* Call for specifications on larger sizes and capacities

**Lifting Beams  
Plate Lifting Beams**

Machining & Welding  
www.MachiningAndWelding.com



Sales@MachiningAndWelding.com



LIFTING BEAMS

**Plate Lifting Beams**

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Max Plate Width : 96"

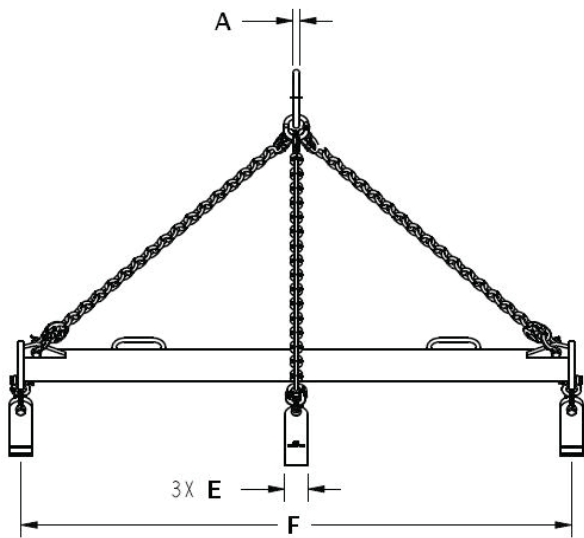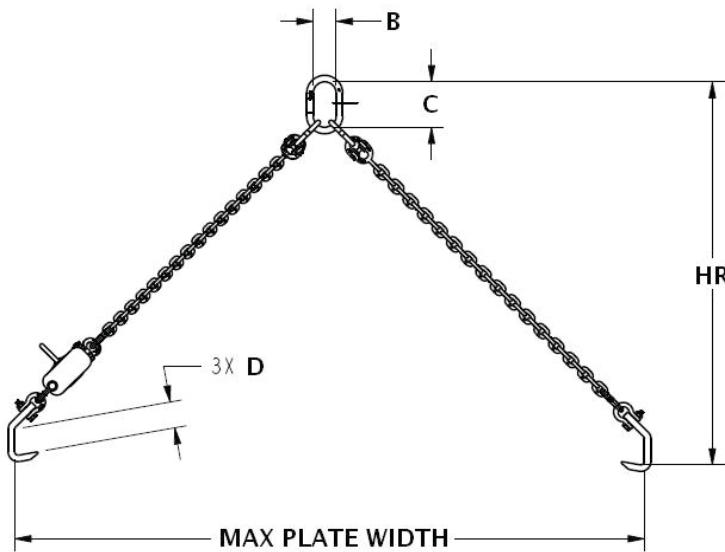

RFID TRACKING



CHIP EQUIPPED

Working Load Limit in Pounds*	Part Number	A	B	C	D	E	F	HR	Weight in Pounds
10,000	<b>14633</b>	0.82	3.00	6.00	3.00	2.75	84	57	140
20,000	<b>14632</b>	1.28	5.00	9.00	4.00	3.50	84	59	245

\* Call for specifications on larger sizes and capacities



Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

**Lifting Beams**  
**Small Length Lift Beams**  
**Lift Bale Top**

**Small Length Lift Beams - Lift Bale Top**

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Beams supplied standard with shackle connections.


Working Load Limit in Pounds*	Part Number	Bale Width	Bale Height	HR	Width	Weight in Pounds	Bottom Lug Hole Dia
500	<b>20347</b>	2"	4"	6.8	12"	8	0.50"
500	<b>20348</b>	2"	4"	6.8	24"	15	0.50"
500	<b>20349</b>	2"	4"	6.8	36"	21	0.50"
2,000	<b>20350</b>	3"	5"	9.8	12"	18	0.85"
2,000	<b>20351</b>	3"	5"	9.8	24"	31	0.85"
2,000	<b>20352</b>	3"	5"	9.8	36"	45	0.85"
6,000	<b>20353</b>	3"	5"	10.8	12"	26	0.95"
6,000	<b>20354</b>	3"	5"	10.8	24"	48	0.95"
6,000	<b>20355</b>	3"	5"	10.8	36"	69	0.95"
20,000	<b>20356</b>	4"	7"	16.1	24"	92	1.12"
20,000	<b>20357</b>	4"	7"	16.1	36"	129	1.12"

\* Call for specifications on larger sizes and capacities

RFID TRACKING



CHIP EQUIPPED

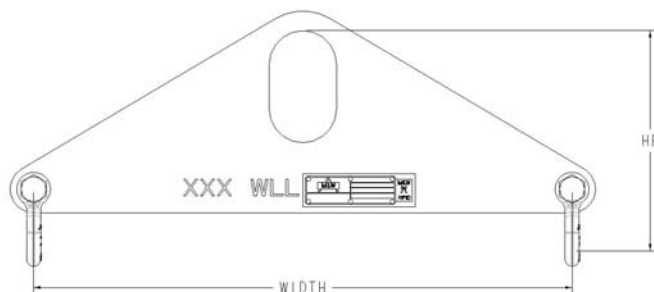

Lifting Beams  
Small Length Lift Beams  
Shackle Top

Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com




Small Length Lift Beams - Shackle Top

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Beams supplied standard with shackle connections.

Working Load Limit in Pounds*	Part Number	Top	HR	Width	Weight in Pounds	Bottom Lug Hole Dia	Top Lug Hole Dia
500	<b>20358</b>	Shackle	8.3	12"	9	0.50"	0.50"
500	<b>20359</b>	Shackle	8.3	24"	16	0.50"	0.50"
500	<b>20360</b>	Shackle	8.3	36"	22	0.50"	0.50"
2,000	<b>20361</b>	Shackle	12.4	12"	19	0.85"	0.85"
2,000	<b>20362</b>	Shackle	12.4	24"	33	0.85"	0.85"
2,000	<b>20363</b>	Shackle	12.4	36"	46	0.85"	0.85"
6,000	<b>20364</b>	Shackle	14.1	12"	32	0.95"	0.95"
6,000	<b>20365</b>	Shackle	14.1	24"	54	0.95"	0.95"
6,000	<b>20366</b>	Shackle	14.1	36"	73	0.95"	0.95"
20,000	<b>20367</b>	Shackle	21.2	24"	107	1.12"	1.50"
20,000	<b>20368</b>	Shackle	21.2	36"	145	1.12"	1.50"

\* Call for specifications on larger sizes and capacities

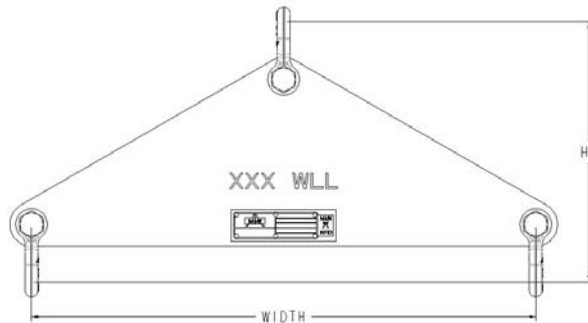

RFID TRACKING



CHIP EQUIPPED

## Lifting Beams Twin Hoist Lifting Beams

Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com





### Twin Hoist Lifting Beams

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- ALL lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Quick and easy lifting of loads with two hoists. Lifting must be done within 5° of vertical.
- Ideally suited to low headroom applications.
- Alloy swivel hook bottom standard connection.
- Load-bearing swivel hook, eye hook, and custom connections available - call for ordering assistance.

RFID TRACKING



CHIP EQUIPPED

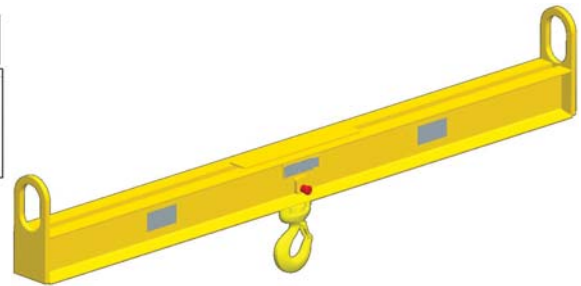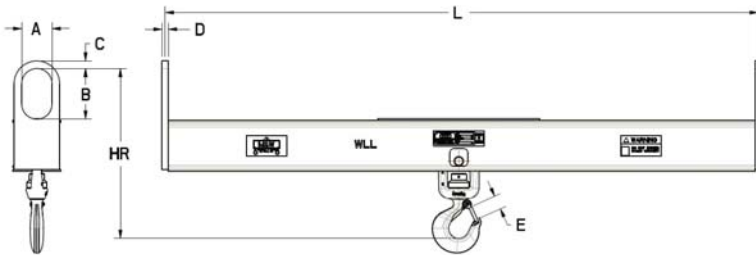

Working Load Limit in Pounds*	Part number Headroom Weight	Spread in Feet - L								A	B	C	D	E
		6	8	10	12	14	16	18	20					
4,000	Part number	16427	16428	16429	16430	16431	16432	16433	16434	3.0	5.0	0.88	0.63	0.96
	HR= Weight	15.10 140	16.10 191	16.10 260	17.10 320	18.10 560	18.10 640	19.10 765	20.10 1,055					
6,000	Part number	16435	16436	16437	16438	16439	16440	16441	16442	3.0	5.0	1.00	0.63	1.08
	HR= Weight	16.50 150	17.50 225	18.50 265	18.50 485	19.50 600	19.50 690	20.50 960	20.50 1,260					
10,000	Part number	16443	16444	16445	16446	16447	16448	16449	16450	3.0	5.0	1.00	0.75	1.56
	HR= Weight	22.31 300	22.31 380	22.31 470	23.31 670	23.31 920	23.31 1,040	25.31 1,005	25.31 1,305					
15,000	Part number	16451	16452	16453	16454	16455	16456	16457	16458	4.0	7.0	1.00	0.75	2.17
	HR= Weight	25.75 310	26.75 395	26.75 580	26.75 810	28.75 950	31.75 1,215	31.75 1,575	31.75 1,740					
20,000	Part number	16459	16460	16461	16462	16463	16464			4.0	7.0	1.25	1.00	2.28
	HR= Weight	27.53 370	27.53 585	29.53 725	32.53 975	32.53 1,565	32.53 1,770							

\* Call for specifications on larger sizes and capacities






Machining & Welding  
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

Lifting Beams  
Ultra Low Headroom Lifting Beams

Ultra Low Headroom Lifting Beams

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Use provided spacers to assure hook remains centered.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Beams supplied standard with alloy swivel latch hook connections.

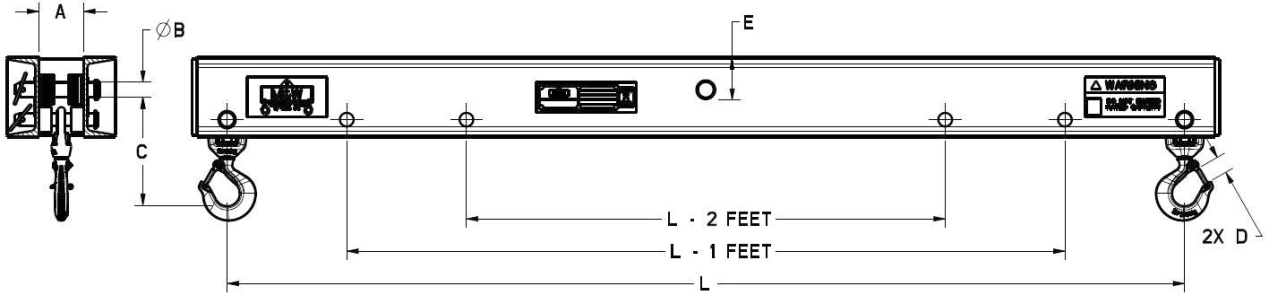

Working Load Limit in Pounds*	Part number Headroom Weight	Spread in Feet - L					A	B	D	
		4	6	8	10	12				
1,000	Part number	16484	16485	16486	16487	16488	2.25	0.63	0.86	
	C=	5.5	5.5	5.5	5.5	5.5				
	E= Weight	1.94	1.94	1.94	1.94	1.94				57
2,000	Part number	16489	16490	16491	16492	16493	2.25	0.75	0.86	
	C=	5.5	5.5	6.5	6.5	6.5				
	E= Weight	2.00	2.00	2.00	2.00	2.00				60
4,000	Part number	16494	16495	16496	16497	16498	2.25	1.00	0.89	
	C=	6.7	6.7	7.1	7.1	7.9				
	E= Weight	2.13	2.13	2.75	2.75	3.00				110
6,000	Part number	16499	16500	16501	16502	16503	3.00	1.25	0.96	
	C=	6.9	7.6	8.6	9.6	9.6				
	E= Weight	2.51	2.76	2.76	2.76	2.76				125
10,000	Part number	16504	16505	16506	16507	16508	3.00	1.50	1.08	
	C=	9.8	9.8	9.8	10.3	10.3				
	E= Weight	3.25	3.25	3.25	3.75	3.75				240

\* Call for specifications on larger sizes and capacities

RFID TRACKING



CHIP EQUIPPED

