



Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

Lifting Beams
Adjustable Length Lifting Beams
with Swivel Hook bottoms


Adjustable Length Lifting Beams with Swivel Hook bottoms

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Quick and easy adjustment of unbalanced loads.
- Ideally suited to low headroom applications.
- Pictured with standard alloy swivel latch hooks.
- Eye hooks and custom connections available - call for ordering assistance.

RFID TRACKING




CHIP EQUIPPED

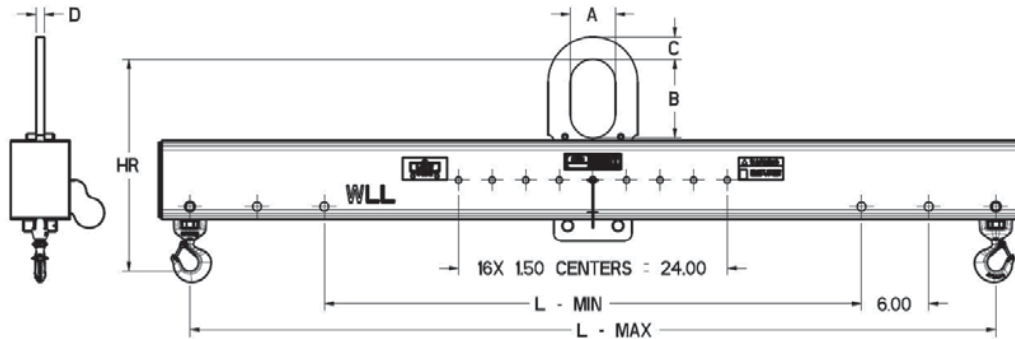

Working Load Limit in Pounds*	Part Number	L min	L max	A	B	C	D	HR	Weight in Pounds
2,000	16410	48	72	3	5	0.75	0.63	13.8	85
2,000	16411	120	144	3	5	0.75	0.63	15.7	285
4,000	16412	48	72	3	5	1.5	0.63	14.6	135
4,000	16413	120	144	3	5	1.5	0.63	16.6	330
6,000	16414	48	72	3	5	1.5	0.63	16.2	160
6,000	16415	120	144	3	5	1.5	0.63	19.1	530
8,000	16416	48	72	4	7	2	0.75	18.9	200
8,000	16417	120	144	4	7	2	0.75	20.9	540
10,000	16418	48	72	4	7	2	0.75	21.2	300
10,000	16419	120	144	4	7	2	0.75	22.2	795
15,000	16420	48	72	4	7	2	1.00	22.1	315
15,000	16421	120	144	4	7	2	1.00	25.1	815

* Call for specifications on larger sizes and capacities

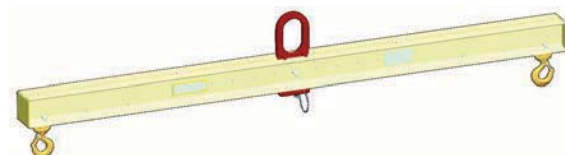

Lifting Beams
Adjustable Length Lifting Beams
with Shackle bottoms

Machining & Welding
 www.MachiningAndWelding.com

Sales@MachiningAndWelding.com




Adjustable Length Lifting Beams with Shackle bottoms

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Quick and easy adjustment of unbalanced loads.
- Ideally suited to low headroom applications.
- Shackle bottoms standard for rigging connections.
- Swivel hooks, eye hooks and custom connections available - call for ordering assistance.

RFID TRACKING




CHIP EQUIPPED

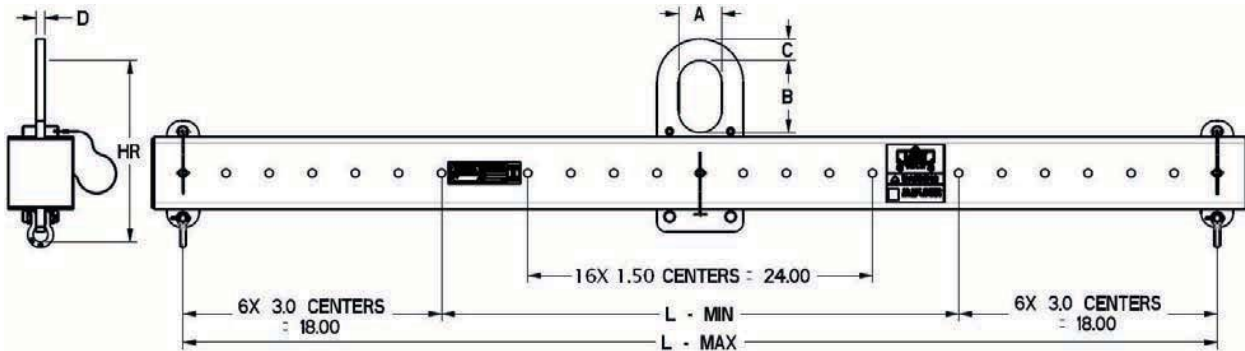

Working Load Limit in Pounds*	Part Number	L min	L max	A	B	C	D	HR	Weight in Pounds
2,000	15101	36	72	3	5	0.75	0.63	11.8	85
2,000	14678	72	144	3	5	0.75	0.63	13.8	285
4,000	12453	36	72	3	5	1.5	0.63	12.6	135
4,000	12495	72	144	3	5	1.5	0.63	14.6	331
6,000	14669	36	72	3	5	1.5	0.63	14.8	170
6,000	14661	72	144	3	5	1.5	0.63	17.8	535
8,000	12503	36	72	4	7	2	0.75	18.0	201
8,000	12512	72	144	4	7	2	0.75	20.0	543
10,000	14651	36	72	4	7	2	0.75	20.0	310
10,000	15108	72	144	4	7	2	0.75	21.0	805
15,000	15117	36	72	4	7	2	1.00	20.7	325
15,000	15128	72	144	4	7	2	1.00	23.7	830

* Call for specifications on larger sizes and capacities

RFID TRACKING
 CHIP EQUIPPED

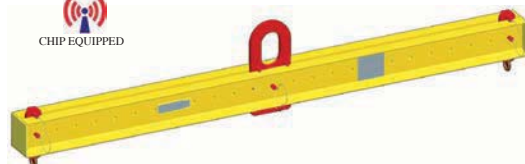



Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

Lifting Beams
Low Headroom, Multiple Length
Standard Lifting Beam

Low Headroom, Multiple Length Standard Lifting Beam

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
 - Pictured with standard alloy swivel latch hooks.
 - Ideally suited for low headroom lifting applications.
 - Multiple latch hooks, eye latch hooks and shackle plates available. Please call for ordering assistance.
- Made in U.S.A.
- Machined to exacting tolerances.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.

Working Load Limit in Pounds	Model Number Headroom (in) Weight (lbs)	Outside Length (L) in Feet				
		4	6	8	10	12
1,000	Part Number	11937	11959	11960	11961	11962
	HR =	13.11	13.11	13.11	13.11	13.11
	LBS =	56	75	95	115	200
2,000	Part Number	11983	11984	11985	11989	11990
	HR =	13.11	13.11	14.11	14.11	14.11
	LBS =	56	75	167	205	240
4,000	Part Number	12032	12033	12034	12039	12042
	HR =	15.12	15.12	16.12	16.12	17.12
	LBS =	98	135	200	295	395
6,000	Part Number	12069	12084	12087	12090	12094
	HR =	15.25	16.25	17.25	18.25	18.25
	LBS =	120	180	255	380	440
10,000	Part Number	12117	12123	12126	12129	12132
	HR =	21.25	21.25	21.25	22.25	21.12
	LBS =	265	345	430	500	590
15,000	Part Number	12162	12165	12168	12171	12174
	HR =	24.27	24.28	25.28	25.28	25.28
	LBS =	265	365	450	640	870
20,000	Part Number	12199	12202	12205	12208	12212
	HR =	23.75	24.75	24.75	26.75	29.75
	LBS =	290	375	625	755	985
30,000	Part Number	12223	12229	12232	12236	12263
	HR =	29.00	29.00	34.00	34.00	40.20
	LBS =	345	555	675	1,235	1,185
40,000	Part Number	12250	12254	12257	12287	12292
	HR =	33.81	33.81	33.81	41.79	41.97
	LBS =	445	850	1,050	1,195	1,540

Lifting Beams
Low Headroom, Multiple Length
Standard Lifting Beam

Machining & Welding
www.MachiningAndWelding.com



Sales@MachiningAndWelding.com



RFID TRACKING



CHIP EQUIPPED

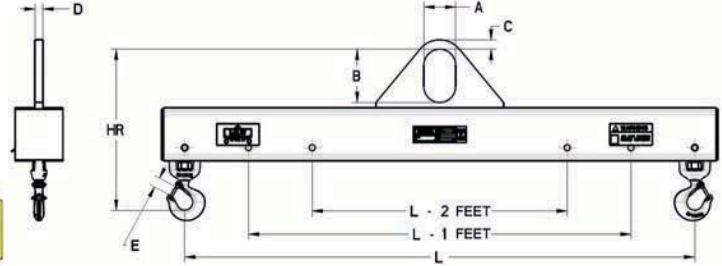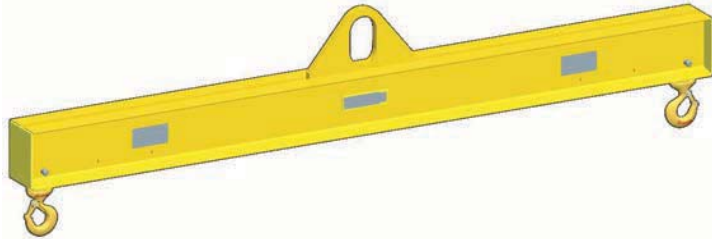

Outside Length (L) in Feet					Other Dimensions	Working Load Limit in Pounds
14	16	18	20	24		
11968 13.11 226	11971 14.11 313	11974 14.11 350	11977 14.11 390	11981 15.11 535	C=.875, A=3.0 B=5.0, D=.75 E=.91	1,000
12017 15.11 320	12018 15.11 365	12019 15.11 500	12020 16.11 525	12024 17.11 945	C=.875, A=3.0 B=5.0, D=.75 E=.91	2,000
12046 18.12 575	12050 18.12 650	12055 19.12 771	12059 20.12 1,060	12063 22.12 1,510	C=.875, A=3.0 B=5.0, D=.75 E=1.0	4,000
12098 19.25 635	12102 19.25 715	12106 20.25 990	12109 20.25 1,295	12112 22.25 1,310	C=1.25, A=3.0 B=5.0, D=1.00 E=1.00	6,000
12138 22.25 970	12141 22.25 1,095	12148 24.25 1,035	12152 24.25 1,340	12155 26.50 1,800	C=2.0, A=4.0 B=7.0, D=1.25 E=1.09	10,000
12177 27.28 1,000	12180 30.28 1,265	12183 30.28 1,405	12186 29.84 1,800		C=2.0, A=4.0 B=7.0, D=1.25 E=1.56	15,000
12215 29.75 1,595	12218 29.75 1,799	12280 35.08 1,655	12284 35.08 1,815		C=2.0, A=4.0 B=7.0, D=1.25 E=1.61	20,000
12267 40.48 1,540	12270 40.66 1,865	12274 40.84 2,250	12277 41.07 2,750		C=2.5, A=5.0 B=9.0, D=1.50 E=2.08	30,000
12295 42.15 1,850	12300 43.58 2,130	12304 43.74 2,555	12307 43.92 3,045		C=2.5, A=5.0 B=9.0, D=1.50 E=2.08	40,000



Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

Lifting Beams
Non-Conductive Lifting Beam



Non-Conductive Lifting Beam

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow lift lug for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Quick and easy adjustment of unbalanced loads.
- Ideally suited to handle large batteries
- Natural spark proof insulation
- Optional Hooks and Lug connections available - call for ordering assistance

RFID TRACKING



CHIP EQUIPPED

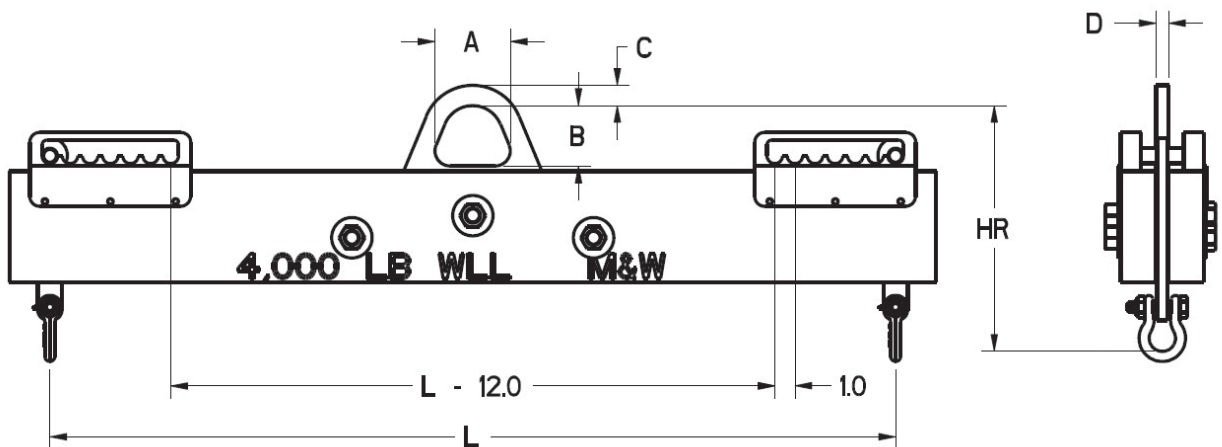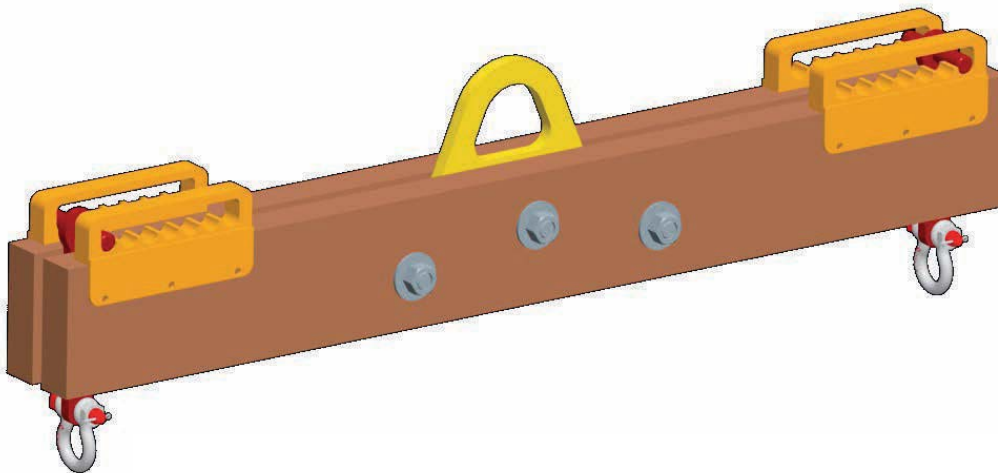

Working Load Limit in Pounds*	Part Number	A	B	C	D	HR	L min	L max
2,000	17441	3.8	3.0	1.0	0.63	10.15	18.0	30.0
2,000	17442	3.8	3.0	1.0	0.63	10.15	30.0	42.0
4,000	17443	3.8	3.0	1.0	0.63	12.20	18.0	30.0
4,000	17171	3.8	3.0	1.0	0.63	12.20	30.0	42.0

* Call for specifications on larger sizes and capacities

**Lifting Beams
Basket Lifting Beam**

Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com




Basket Lifting Beam

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Designed to be used with lifting slings in a basket hitch
- Two sets of lifting sling hooks are standard
- Hooks designed for 2" eye width
- Custom configurations available - call for ordering assistance

RFID TRACKING



CHIP EQUIPPED

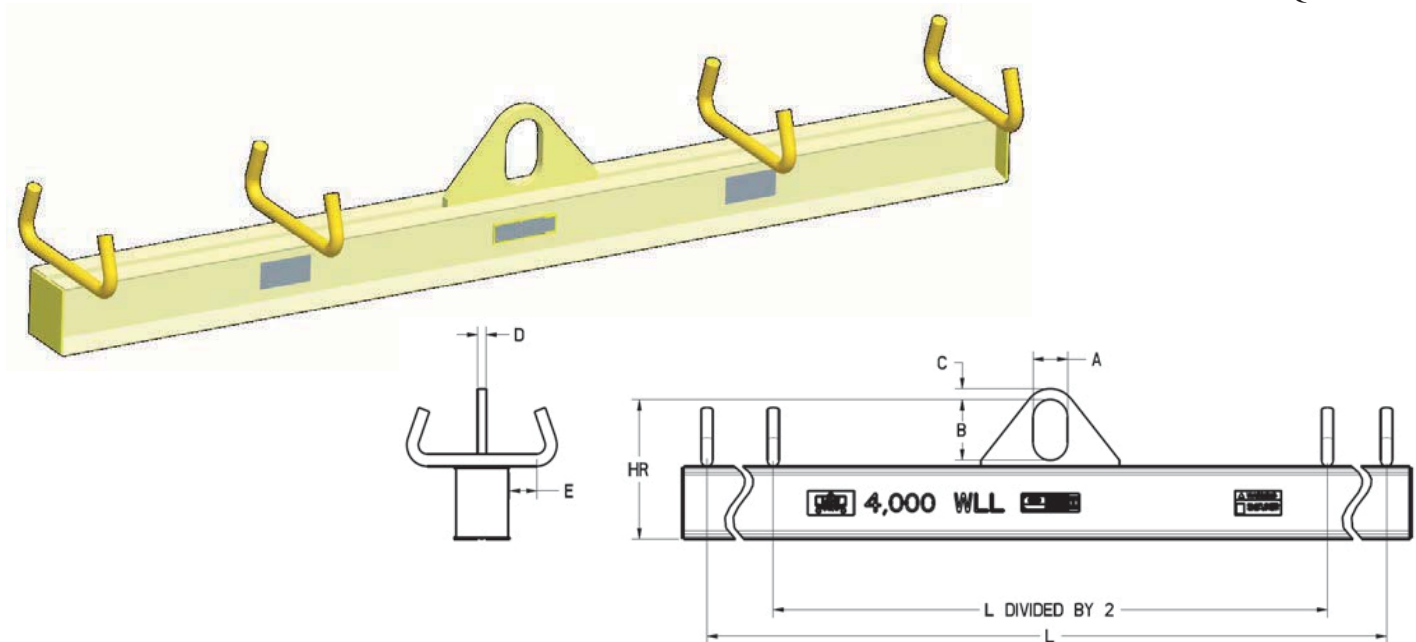

Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*							A (in) B (in) E (in)
		4	6	8	10	12	14	16	
1,000	Part Number	17492	17493	17494	17495	17496	17497	17498	3.0
	HR =	9.50	9.50	9.50	9.50	9.50	9.50	10.50	5.0
	LBS =	65	80	100	120	205	235	315	2.0
2,000	Part Number	17499	17500	17501	17502	17503	17504	17505	3.0
	HR =	9.50	9.50	10.50	10.50	10.50	11.50	11.50	5.0
	LBS =	65	80	175	210	245	325	370	2.0
4,000	Part Number	17506	17507	17514	17508	17509	17510	17511	3.0
	HR =	10.50	10.50	11.50	11.50	12.50	13.50	13.50	5.0
	LBS =	110	150	210	310	340	580	660	2.0
10,000	Part Number	17512	17513	17514	17515	17516	17517	16574	3.0
	HR =	16.37	16.37	16.37	17.37	17.37	17.37	17.37	5.0
	LBS =	260	340	425	510	720	965	1,090	2.0

* Call for specifications on larger sizes and capacities



Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

Lifting Beams
Economy H-Beam

Economy H-Beam

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.

- Quick and easy adjustment of unbalanced loads.
- Ideally suited to low headroom applications.
- Eye hooks and custom connections available - call for ordering assistance.


RFID TRACKING



CHIP EQUIPPED


Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*			
		4	6	8	10
1,000 48" Width	Part Number	17560	17563	17566	
	HR =	15.1	15.1	16.1	
	LBS =	135	150	185	
2,000 48" Width	Part Number	17569	17572	17575	
	HR =	16.1	17.1	17.1	
	LBS =	150	180	250	
4,000 48" Width	Part Number	17578	17582	17586	17590
	HR =	18.1	19.1	20.1	20.1
	LBS =	185	245	360	415
8,000 48" Width	Part Number		17598	17602	17606
	HR =		25.6	25.6	25.6
	LBS =		305	410	565

* Call for specifications on larger sizes and capacities

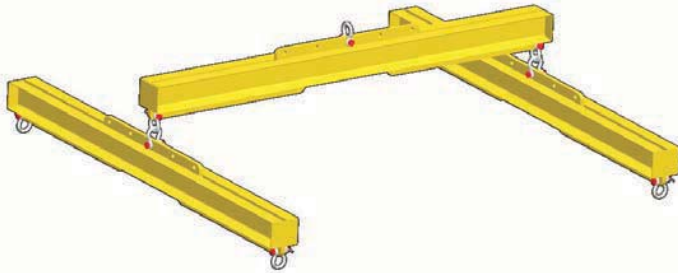

Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*			
		4	6	8	10
1,000 72" Width	Part Number	17561	17564	17567	
	HR =	15.1	15.1	16.1	
	LBS =	165	180	215	
2,000 72" Width	Part Number	17570	17573	17576	
	HR =	17.1	17.1	18.1	
	LBS =	170	200	340	
4,000 72" Width	Part Number	17579	17583	17587	17591
	HR =	19.1	19.1	21.1	21.1
	LBS =	255	285	400	455
8,000 72" Width	Part Number		17599	17603	17607
	HR =		26.6	26.6	26.6
	LBS =		425	530	685

* Call for specifications on larger sizes and capacities

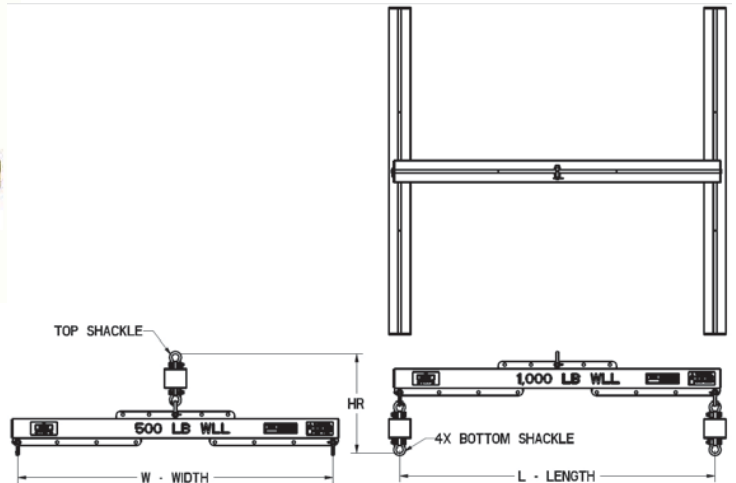

Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*			
		4	6	8	10
1,000 96" Width	Part Number	17562	17565	17568	
	HR =	15.1	15.1	16.1	
	LBS =	195	210	245	
2,000 96" Width	Part Number	17571	17574	17577	
	HR =	17.1	17.1	18.1	
	LBS =	240	270	340	
4,000 96" Width	Part Number	17580	17584	17588	17592
	HR =	19.1	19.1	20.1	20.1
	LBS =	365	425	540	595
8,000 96" Width	Part Number		17600	17604	17608
	HR =		27.6	27.6	27.6
	LBS =		655	760	915

* Call for specifications on larger sizes and capacities

Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*			
		4	6	8	10
4,000 120" Width	Part Number	17581	17585	17589	17593
	HR =	19.1	19.1	21.1	21.1
	LBS =	425	485	600	655
8,000 120" Width	Part Number		17601	17605	17609
	HR =		27.6	27.6	27.6
	LBS =		765	870	1,025

* Call for specifications on larger sizes and capacities

**Lifting Beams
Bottle Lifting Device**

Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com



Bottle Lifting Device






- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Bottle Lifters proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
 - Adjustable straps to hold tanks
 - Lockable doors

- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.

RFID TRACKING



CHIP EQUIPPED

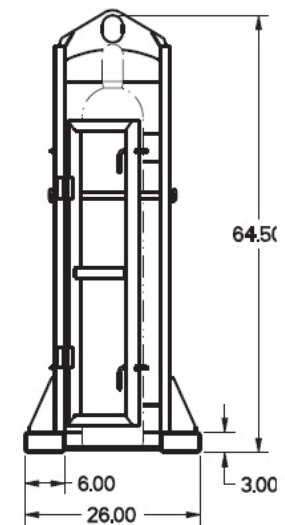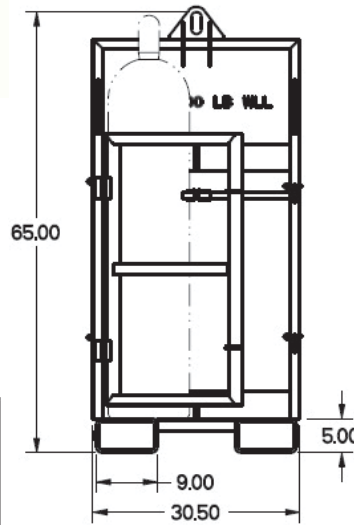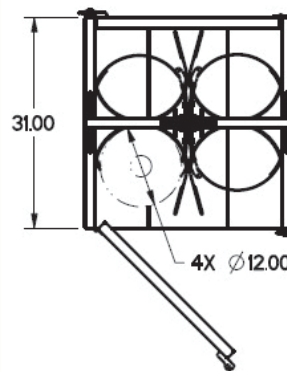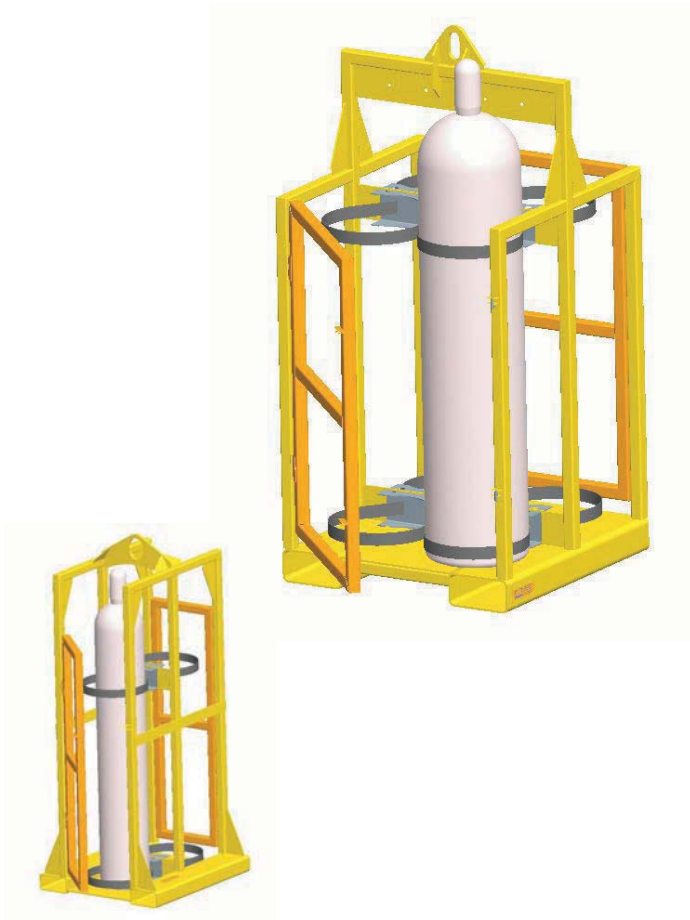

4 BOTTLE LIFTER

2 BOTTLE LIFTER

Working Load Limit in Pounds*	Part Number	Tank Capacity	Weight
750	16307	2	300
1,500	17324	4	525

* Call for specifications on larger sizes and capacities




Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

Lifting Beams
Ultra Low Headroom Lifting Beams

Ultra Low Headroom Lifting Beams

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Use provided spacers to assure hook remains centered.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Beams supplied standard with alloy swivel latch hook connections.

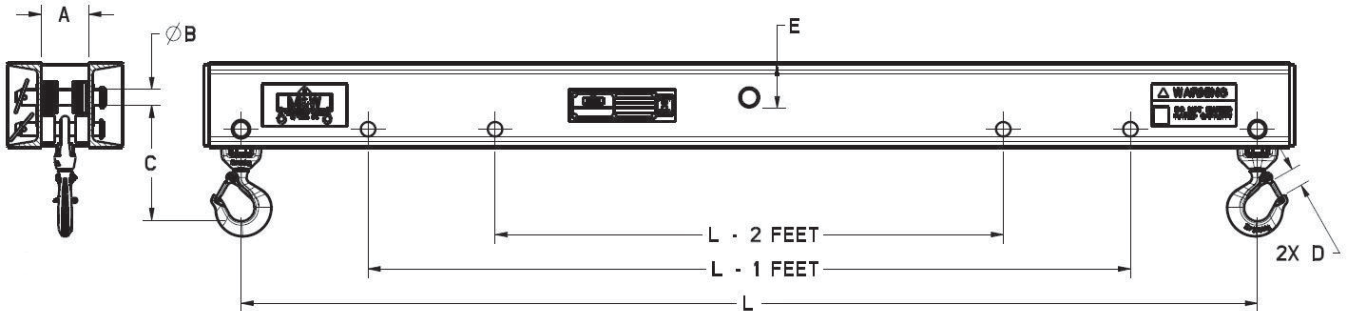


Working Load Limit in Pounds*	Part number Headroom Weight	Spread in Feet - L					A	B	D
		4	6	8	10	12			
1,000	Part number	16484	16485	16486	16487	16488	2.25	0.63	0.86
	C=	5.5	5.5	5.5	5.5	5.5			
	E=	1.94	1.94	1.94	1.94	1.94			
	Weight	57	82	100	120	145			
2,000	Part number	16489	16490	16491	16492	16493	2.25	0.75	0.86
	C=	5.5	5.5	6.5	6.5	6.5			
	E=	2.00	2.00	2.00	2.00	2.00			
	Weight	60	85	175	215	250			
4,000	Part number	16494	16495	16496	16497	16498	2.25	1.00	0.89
	C=	6.7	6.7	7.1	7.1	7.9			
	E=	2.13	2.13	2.75	2.75	3.00			
	Weight	110	150	210	310	345			
6,000	Part number	16499	16500	16501	16502	16503	3.00	1.25	0.96
	C=	6.9	7.6	8.6	9.6	9.6			
	E=	2.51	2.76	2.76	2.76	2.76			
	Weight	125	185	255	300	400			
10,000	Part number	16504	16505	16506	16507	16508	3.00	1.50	1.08
	C=	9.8	9.8	9.8	10.3	10.3			
	E=	3.25	3.25	3.25	3.75	3.75			
	Weight	240	320	400	490	695			

* Call for specifications on larger sizes and capacities

RFID TRACKING



CHIP EQUIPPED

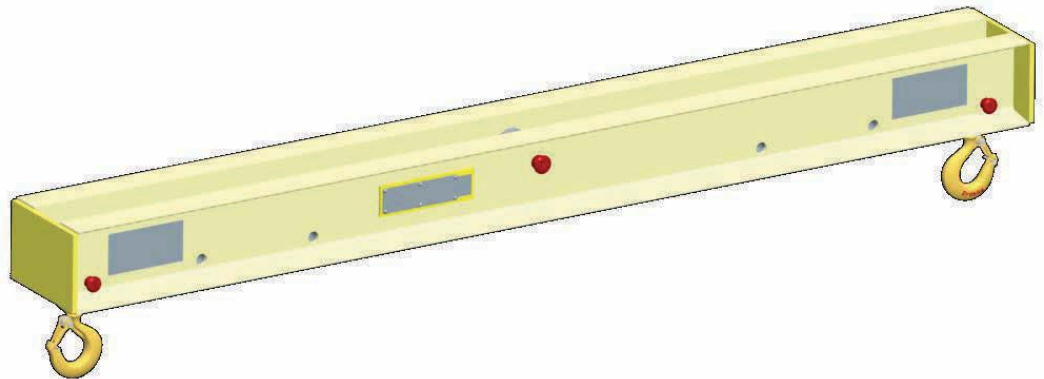

Lifting Beams Twin Hoist Lifting Beams

Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com





Twin Hoist Lifting Beams

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Quick and easy lifting of loads with two hoists. Lifting must be done within 5° of vertical.
- Ideally suited to low headroom applications.
- Alloy swivel hook bottom standard connection.
- Load-bearing swivel hook, eye hook, and custom connections available - call for ordering assistance.

RFID TRACKING



CHIP EQUIPPED

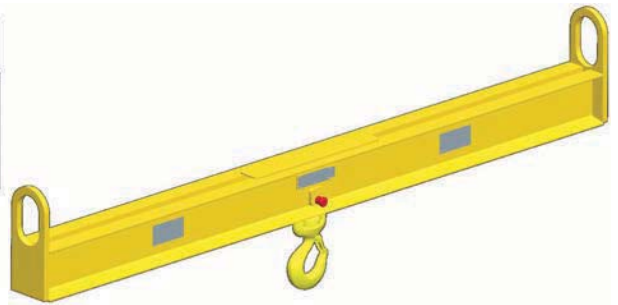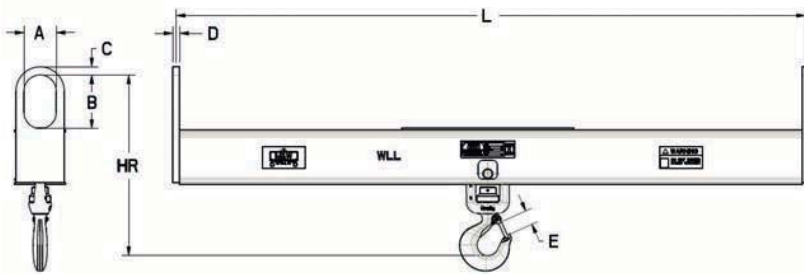

Working Load Limit in Pounds*	Part number Headroom Weight	Spread in Feet - L								A	B	C	D	E
		6	8	10	12	14	16	18	20					
4,000	Part number	16427	16428	16429	16430	16431	16432	16433	16434	3.0	5.0	0.88	0.63	0.96
	HR= Weight	15.10 140	16.10 191	16.10 260	17.10 320	18.10 560	18.10 640	19.10 765	20.10 1,055					
6,000	Part number	16435	16436	16437	16438	16439	16440	16441	16442	3.0	5.0	1.00	0.63	1.08
	HR= Weight	16.50 150	17.50 225	18.50 265	18.50 485	19.50 600	19.50 690	20.50 960	20.50 1,260					
10,000	Part number	16443	16444	16445	16446	16447	16448	16449	16450	3.0	5.0	1.00	0.75	1.56
	HR= Weight	22.31 300	22.31 380	22.31 470	23.31 670	23.31 920	23.31 1,040	25.31 1,005	25.31 1,305					
15,000	Part number	16451	16452	16453	16454	16455	16456	16457	16458	4.0	7.0	1.00	0.75	2.17
	HR= Weight	25.75 310	26.75 395	26.75 580	26.75 810	28.75 950	31.75 1,215	31.75 1,575	31.75 1,740					
20,000	Part number	16459	16460	16461	16462	16463	16464			4.0	7.0	1.25	1.00	2.28
	HR= Weight	27.53 370	27.53 585	29.53 725	32.53 975	32.53 1,565	32.53 1,770							

* Call for specifications on larger sizes and capacities




Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com


Lifting Beams Adjustable Economy Lifting Beams

Adjustable Economy Lifting Beams

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
 - Quick and easy adjustment of unbalanced loads.
 - Ideally suited to low headroom applications.
 - Shackle bottoms standard for rigging connections.
 - Swivel hooks, eye hooks and custom connections available - call for ordering assistance.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Beams supplied standard with shackle connections.

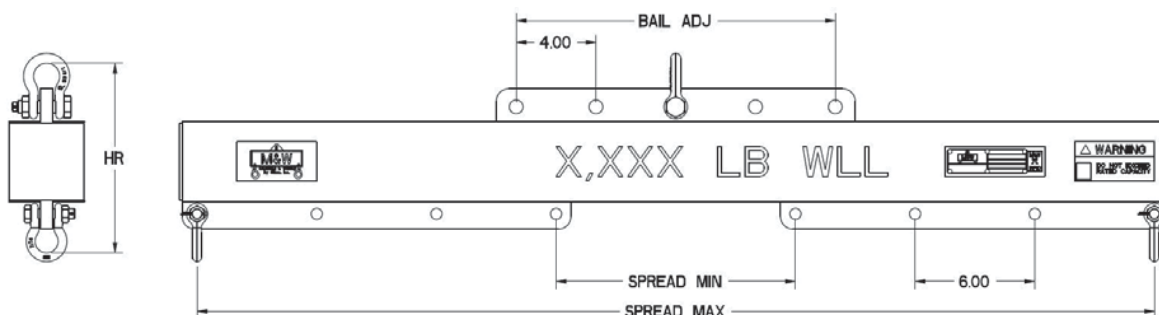

Working Load Limit in Pounds*	Part Number	Max Spread	Min Spread	Bail Adj	HR	Weight in Pounds	Top Shackle Part Number	Bottom Shackle Part Number
500	13855	48	12	16	7.57	45	1019470	1019470
500	13862	72	36	16	7.57	60	1019470	1019470
500	13866	96	60	16	7.57	75	1019470	1019470
1,000	13878	48	12	16	7.57	45	1019470	1019470
1,000	13879	72	36	16	7.57	60	1019470	1019470
1,000	13869	96	60	24	8.57	95	1019470	1019470
2,000	13880	48	12	16	8.57	60	1019470	1019470
2,000	13886	72	36	24	9.57	80	1019470	1019470
2,000	13889	96	60	24	9.57	150	1019470	1019470
2,000	13893	120	84	24	9.57	180	1019470	1019470
4,000	13924	48	12	16	9.48	65	1019472	1019471
4,000	13933	72	36	24	10.48	125	1019472	1019471
4,000	13938	96	60	24	11.48	240	1019472	1019471
4,000	14130	120	84	24	11.48	295	1019472	1019471
8,000	14134	72	24	32	15.12	175	1019515	1019490
8,000	14150	96	48	32	16.12	280	1019515	1019490
8,000	14154	120	72	32	16.12	435	1019515	1019490
10,000	14159	96	36	32	16.12	365	1019515	1019490
10,000	14162	120	60	32	17.12	465	1019515	1019490
10,000	14167	144	84	32	18.12	675	1019515	1019490
14,000	14171	120	48	32	19.42	610	1019533	1019515
14,000	14177	144	72	32	21.42	715	1019533	1019515
14,000	14182	168	96	32	21.42	965	1019533	1019515



RFID TRACKING



CHIP EQUIPPED



* Call for specifications on larger sizes and capacities



Plate Lifting Beams

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.

- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Max Plate Width : 96"

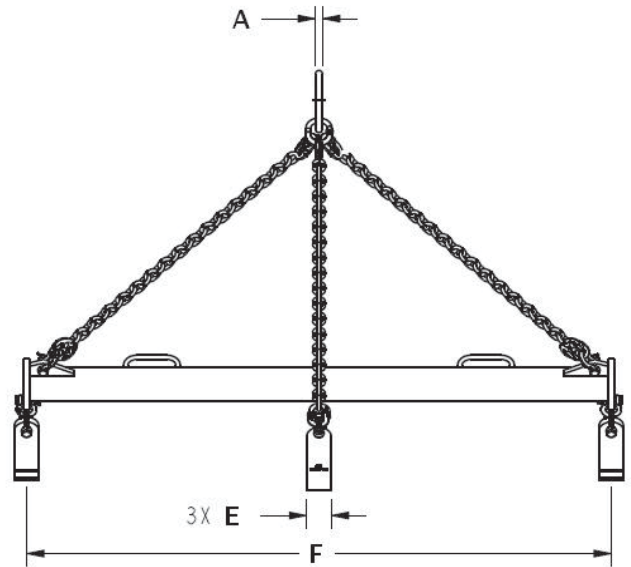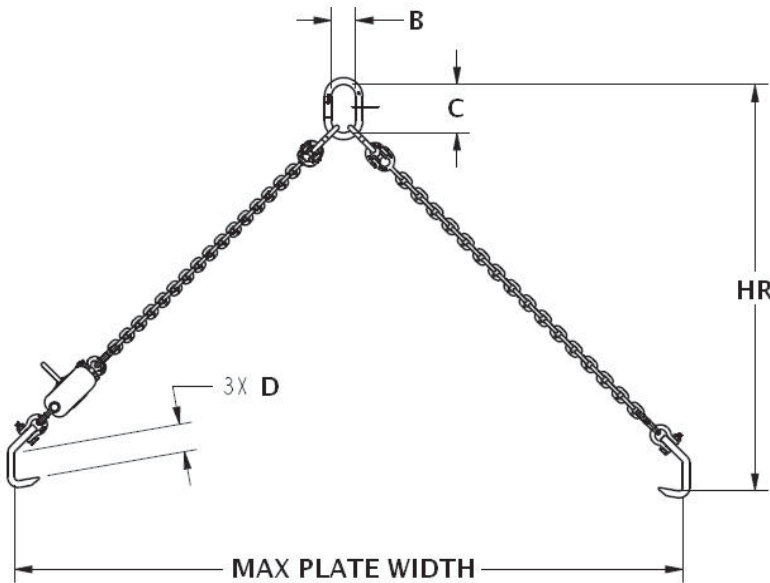

RFID TRACKING



CHIP EQUIPPED

Working Load Limit in Pounds*	Part Number	A	B	C	D	E	F	HR	Weight in Pounds
10,000	14633	0.82	3.00	6.00	3.00	2.75	84	57	140
20,000	14632	1.28	5.00	9.00	4.00	3.50	84	59	245

* Call for specifications on larger sizes and capacities




Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

Lifting Beams Economy (Fixed Length) Lifting Beams

Economy (Fixed Length) Lifting Beams

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Beams supplied standard with shackle connections.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.

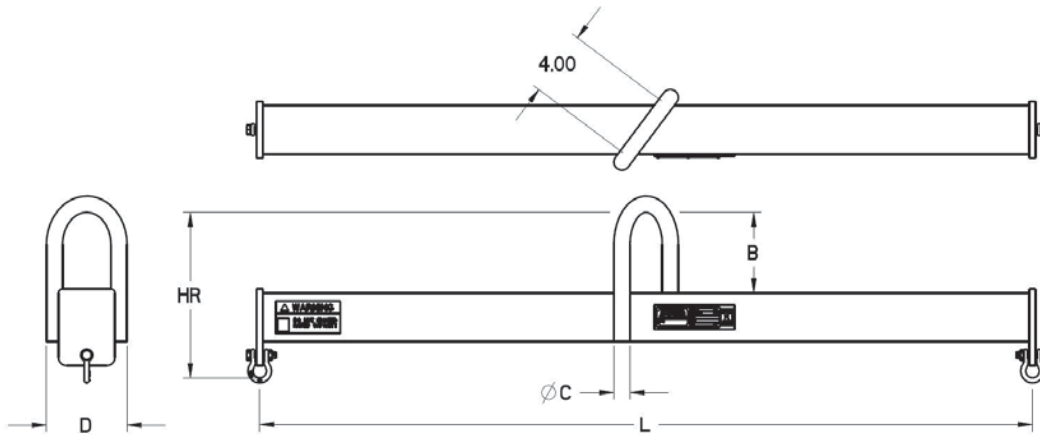

RFID TRACKING



CHIP EQUIPPED

Working Load Limit in Pounds*	Part number Headroom Weight	Spread in Inches - L										C	B	D
		24	36	42	48	54	60	66	72	96	120			
500	Part number	16561	12540	15028	11525	15031	15034	15037	11526	11527	11528	0.75	5.0	3.5
	HR= Weight	10.25 17	10.25 22	10.25 25	10.25 28	10.25 30	10.25 33	10.25 36	10.25 38	10.25 49	10.25 60			
1,000	Part number	16140	12546	15040	11529	15043	15046	15049	11530	11531	11532	0.75	5.0	3.5
	HR= Weight	10.25 27	10.25 28	10.25 30	10.25 34	10.25 36	10.25 40	10.25 43	10.25 48	10.25 63	11.25 94			
2,000	Part number	16124	15054	15057	11533	15060	15063	15066	11534	11535	11536	1.00	5.0	5.0
	HR= Weight	10.25 26	10.25 35	10.25 39	10.25 47	11.25 57	11.25 62	11.25 67	11.25 72	13.25 124	12.25 132			
4,000	Part number	16381	15070	15073	11537	15076	15079	15082	11538	11539	11540	1.00	5.0	5.0
	HR= Weight	11.51 32	12.50 50	12.50 54	12.50 61	13.50 75	13.50 82	13.50 89	13.50 96	13.50 124	15.50 187			
6,000	Part number	16382	14433	15085	14438	15092	15095	15098	14442	14445	14452	1.50	7.0	6.0
	HR= Weight	14.77 48	15.77 66	15.77 73	17.77 95	17.77 104	17.77 113	17.77 122	17.77 130	17.77 227	17.77 351			


* Call for specifications on larger sizes and capacities





Barrel / Bucket Lifter


- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- Durable construction ideally suited to jobsite or warehouse use.
- Drum lid MUST be properly secured
- Self-adjusting to lift rimmed steel, plastic or fiber drums
- Made in U.S.A.
- Machined to exacting tolerances.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- ALL lifting equipment individually proof loaded per OSHA requirements.

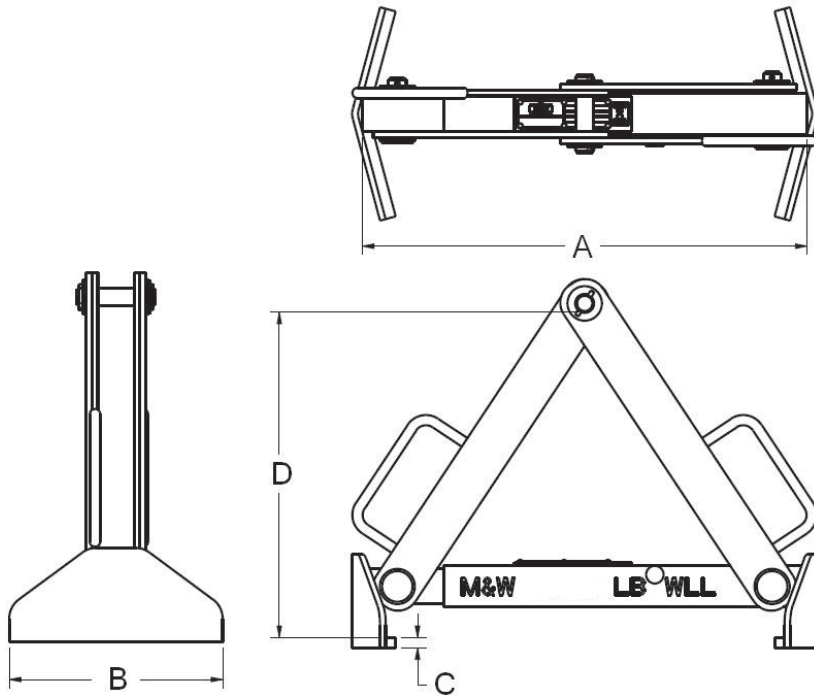

RFID TRACKING



CHIP EQUIPPED

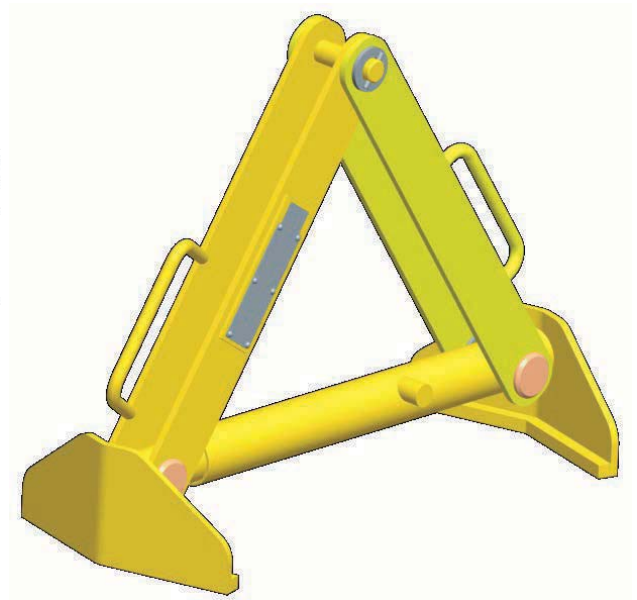

Working Load Limit in Pounds*	Part Number	Weight in Pounds	A min	A max	B	C	D
1,200	16291	22	18.0	29.0	9.1	0.44	13.9
1,000	16656	17	14.0	20.0	9.1	0.44	11.9

* Call for specifications on larger sizes and capacities



Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

Lifting Beams
Bulk Container Lifting Beam

Bulk Container Lifting Beam

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** material handling equipment proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Machined to exacting tolerances.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.




Part Number*	SPREAD	A	B	C	D	E	HR	Weight	Working Load Limit in Pounds*
13316	36	1.0	3.0	4.0	5.0	50.9	8.0	105	2,000
13310	48	1.0	3.0	4.0	5.0	67.9	8.0	135	2,000
13325	36	1.0	3.0	4.0	5.0	50.9	10.0	120	4,000
13321	48	1.0	3.0	4.0	5.0	67.9	10.0	150	4,000

*Larger capacities and custom configurations available. Please call for ordering assistance.

RFID TRACKING



CHIP EQUIPPED

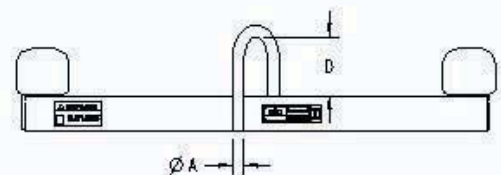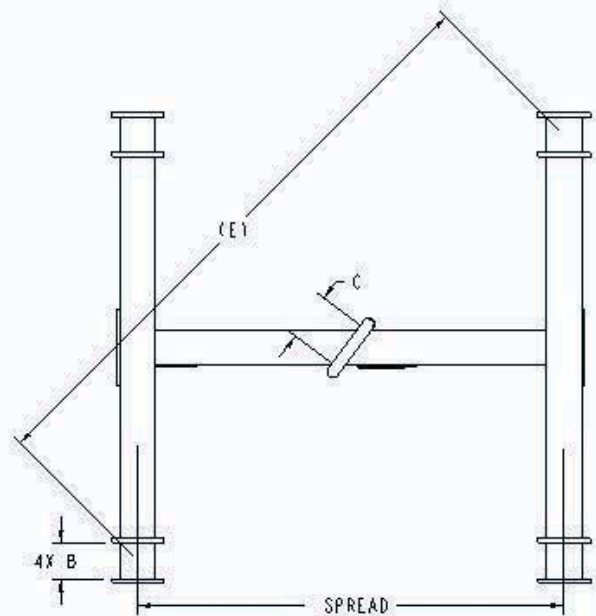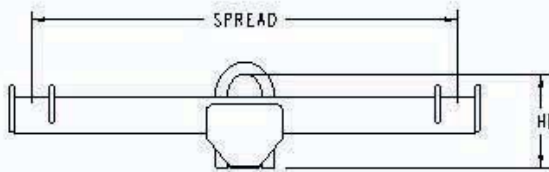

Material Stands
Load Tested, Heavy-Duty Material Stands
with Channel or Box Steel top options

Machining & Welding
 www.MachiningAndWelding.com


Sales@MachiningAndWelding.com



Material Stands: Load Tested, Heavy Duty


- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- Durable construction ideally suited to warehouse or manufacturing shop floor use.

- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL Material Stands individually proof loaded and shipped with certification paperwork.**
- All dimensions in inches unless otherwise noted.

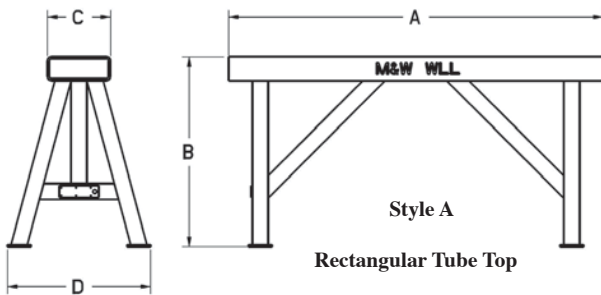

Working Load Limit in Pounds*	Part Number	A	B	C	D	E	Weight in Pounds
3,000	13903	42.0	28.0	12.0	20.0	36.0	140
5,000	16527	42.0	29.0	12.0	20.0	36.0	173
7,000	13777	47.5	24.0	8.0	18.2	41.5	125
10,000	16528	47.5	25.0	8.0	19.2	41.5	130

* Call for specifications on larger sizes and capacities

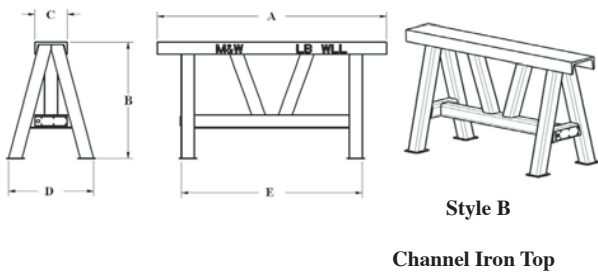


Working Load Limit in Pounds*	Part Number	A	B	C	D	E	Weight in Pounds
2,000	15262	35.5	18.0	5.0	13.2	28.0	75
2,000	15281	35.5	32.0	5.0	20.7	28.0	105
5,000	15307	35.5	18.0	6.0	14.3	28.0	90
5,000	15306	35.5	32.0	6.0	21.5	28.0	120
7,000	15309	35.5	18.0	8.0	14.6	28.0	100
7,000	15308	35.5	32.0	8.0	22.1	28.0	135
10,000	15327	35.5	18.0	10.0	14.5	28.0	125
10,000	15312	35.5	32.0	10.0	22.0	28.0	160

* Call for specifications on larger sizes and capacities

RFID TRACKING



CHIP EQUIPPED

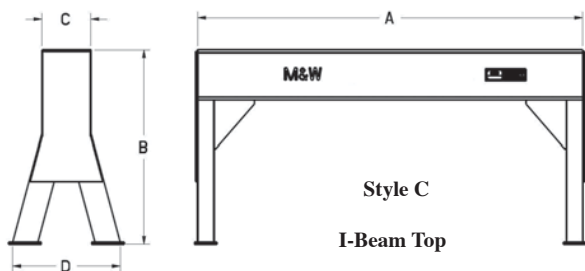

Working Load Limit in Pounds*	Part Number	A	B	C	D	Weight in Pounds
5,000	16533	47.5	24.0	4.0	13.4	110
10,000	16534	47.5	24.0	6.0	13.3	145
15,000	16535	47.5	24.0	5.3	14.3	150
20,000	16536	47.5	24.0	6.5	14.4	195
30,000	16537	47.5	24.0	8.0	15.5	245

* Call for specifications on larger sizes and capacities



Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

Lifting Beams
Coil Lifters

Coil Lifters


- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Coil Lifters proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.



RFID TRACKING



CHIP EQUIPPED

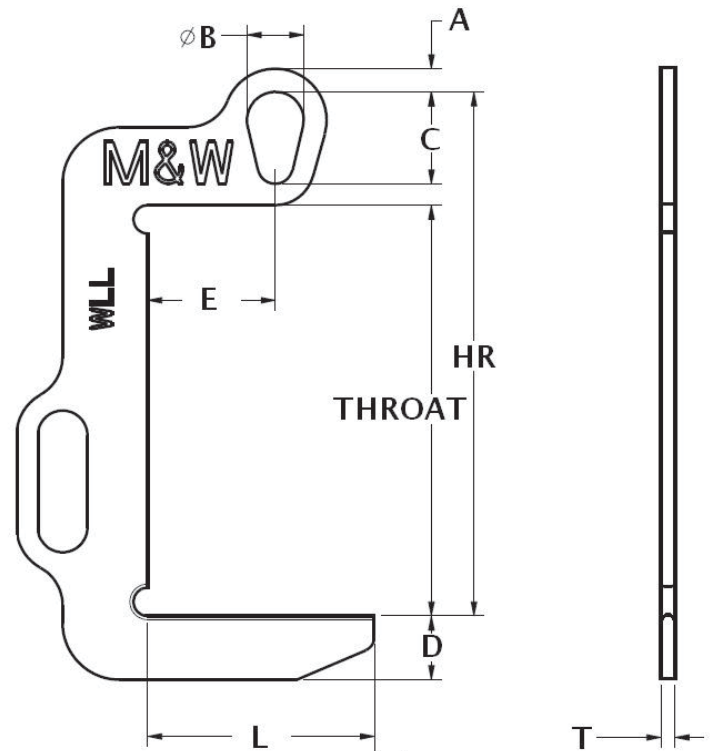

Working Load Limit in Pounds*	Part Number	Throat	HR	A	B	C	D	E	L	T	Weight in Pounds
1,000	14463	14.5	18.5	0.81	2.00	3.25	2.25	4.5	8.0	0.50	14
1,000	14464	14.5	18.5	0.81	2.00	3.25	2.63	6.5	12.0	0.50	15
2,000	14465	17.5	21.5	0.81	2.00	3.25	2.00	4.5	8.0	0.50	14
2,000	14466	17.5	21.5	0.81	2.00	3.25	2.50	8.5	16.0	0.50	19
4,000	14467	19.5	24.6	1.00	2.56	4.06	2.13	4.5	8.0	0.75	27
4,000	14468	19.5	24.6	1.00	2.56	4.06	3.00	8.5	16.0	0.75	35
7,000	14469	21.5	28.2	1.18	3.63	5.31	2.87	6.5	12.0	1.00	52
7,000	14470	21.5	28.2	1.18	3.63	5.31	3.38	8.5	16.0	1.00	59
10,000	14471	25.5	32.9	1.50	4.00	5.81	3.50	8.5	16.0	1.25	87
10,000	14472	25.5	32.9	1.50	4.00	5.81	4.00	10.5	20.0	1.25	101

* Call for specifications on larger sizes and capacities





Coil Lifter/Upender

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Coil Lifters proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Easy horizontal to vertical upending of coils

RFID TRACKING



CHIP EQUIPPED

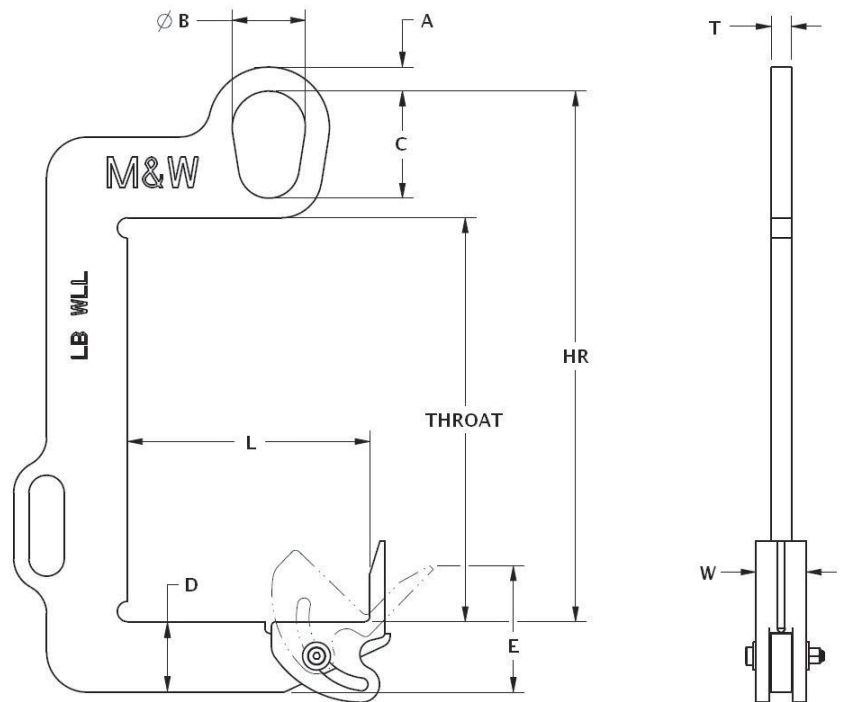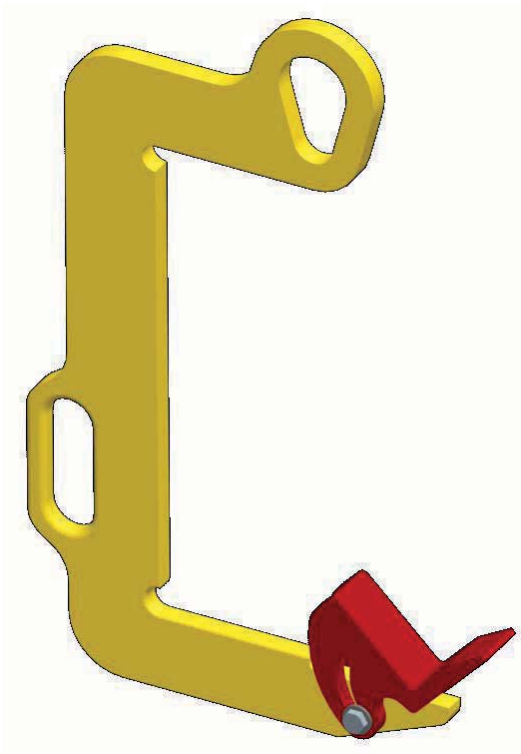

Working Load Limit in Pounds*	Part Number	Throat	HR	A	B	C	E	T	W	L	D	Weight in Pounds
1,000	14480	13.0	17.0	0.81	2.00	3.31	4.06	0.50	2.00	6.0	2.25	17
1,000	14481	13.0	17.0	0.81	2.00	3.31	4.56	0.50	2.00	12.0	2.75	23
2,000	14482	16.0	20.0	0.81	2.00	3.31	3.89	0.50	2.00	8.0	2.50	20
4,000	14483	18.0	23.1	1.00	2.63	4.00	5.05	0.75	2.00	10.0	2.75	33
7,000	14484	20.0	26.3	1.18	3.63	5.31	6.26	1.00	2.50	12.0	3.50	61

* Call for specifications on larger sizes and capacities



Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

Lifting Beams
Small Length Lift Beams
Lift Bale Top

Small Length Lift Beams - Lift Bale Top

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Beams supplied standard with shackle connections.


Working Load Limit in Pounds*	Part Number	Bale Width	Bale Height	HR	Width	Weight in Pounds	Bottom Lug Hole Dia
500	20347	2"	4"	6.8	12"	8	0.50"
500	20348	2"	4"	6.8	24"	15	0.50"
500	20349	2"	4"	6.8	36"	21	0.50"
2,000	20350	3"	5"	9.8	12"	18	0.85"
2,000	20351	3"	5"	9.8	24"	31	0.85"
2,000	20352	3"	5"	9.8	36"	45	0.85"
6,000	20353	3"	5"	10.8	12"	26	0.95"
6,000	20354	3"	5"	10.8	24"	48	0.95"
6,000	20355	3"	5"	10.8	36"	69	0.95"
20,000	20356	4"	7"	16.1	24"	92	1.12"
20,000	20357	4"	7"	16.1	36"	129	1.12"

* Call for specifications on larger sizes and capacities

RFID TRACKING



CHIP EQUIPPED

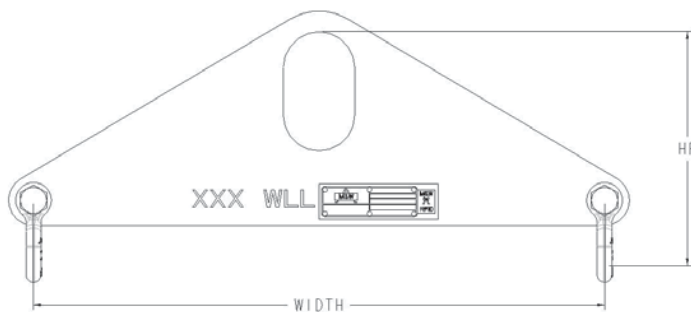




Small Length Lift Beams - Shackle Top

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Beams supplied standard with shackle connections.

Working Load Limit in Pounds*	Part Number	Top	HR	Width	Weight in Pounds	Bottom Lug Hole Dia	Top Lug Hole Dia
500	20358	Shackle	8.3	12"	9	0.50"	0.50"
500	20359	Shackle	8.3	24"	16	0.50"	0.50"
500	20360	Shackle	8.3	36"	22	0.50"	0.50"
2,000	20361	Shackle	12.4	12"	19	0.85"	0.85"
2,000	20362	Shackle	12.4	24"	33	0.85"	0.85"
2,000	20363	Shackle	12.4	36"	46	0.85"	0.85"
6,000	20364	Shackle	14.1	12"	32	0.95"	0.95"
6,000	20365	Shackle	14.1	24"	54	0.95"	0.95"
6,000	20366	Shackle	14.1	36"	73	0.95"	0.95"
20,000	20367	Shackle	21.2	24"	107	1.12"	1.50"
20,000	20368	Shackle	21.2	36"	145	1.12"	1.50"

* Call for specifications on larger sizes and capacities

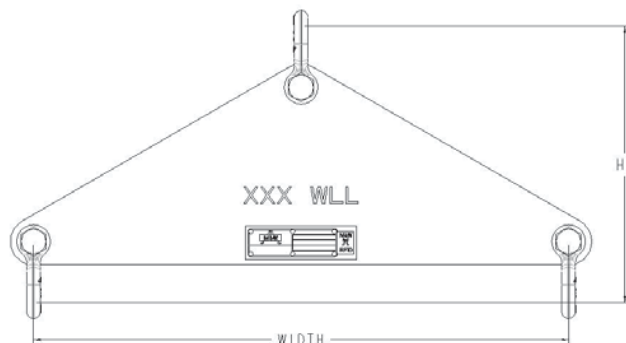

RFID TRACKING



CHIP EQUIPPED




Machining & Welding
www.MachiningAndWelding.com

Sales@MachiningAndWelding.com

Lifting Beams Indexing Barrier Lifting Beams

Indexing Barrier Lifting Beams

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.

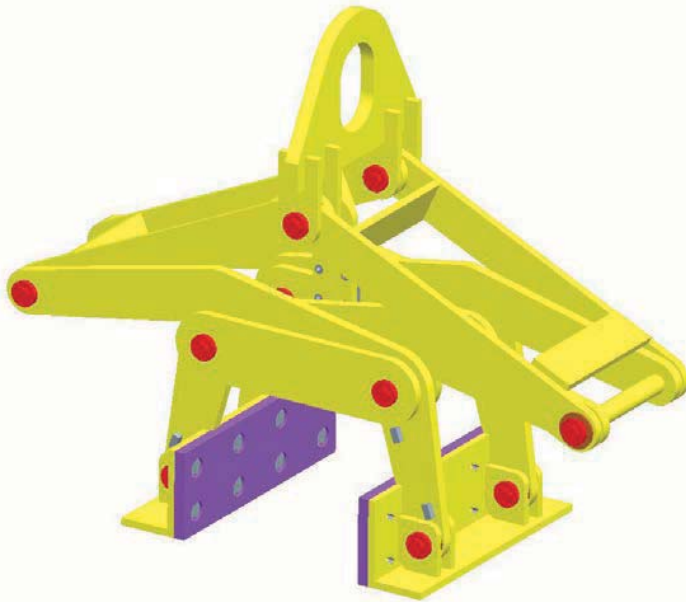

- **Part Number 19790**
- Heavy-duty design to hold up to outdoor environments where barriers are commonly used.
- Stainless steel indexing latch mechanism.
- Rugged gripping pads swivel to conform to load.
- Indexing latch mechanism uses gravity to cause barrier lifter tongs to close tightly.
- Indexing latch mechanism also releases the barrier from the tongs.
- **19790-31** Replacement pad installs easily and quickly.
- **19790-40** Operator Extension Handle keeps ground personnel away from load when adjustment is needed.
- Large lifting eye accommodates crane hook.
- Handles barriers with 6" to 12" width at the top of the barrier.
- 9,000 pound capacity.

RFID TRACKING



CHIP EQUIPPED